



	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19				
P																							
N																							
M																							
L																							
K																							
J																							
H																							
G																							
F																							
E																							
D																							
C																							
B																							
A																							
SCHEDULE OF SPECIAL INSPECTION SERVICES																							
PROJECT		GRADY ESTORIA URGENT CARE			PROJECT		GRADY ESTORIA URGENT CARE			PROJECT		GRADY ESTORIA URGENT CARE			PROJECT		GRADY ESTORIA URGENT CARE						
MATERIAL / ACTIVITY		SERVICE	APPLICABLE TO THIS PROJECT		MATERIAL / ACTIVITY	SERVICE	APPLICABLE TO THIS PROJECT		MATERIAL / ACTIVITY	SERVICE	APPLICABLE TO THIS PROJECT		MATERIAL / ACTIVITY	SERVICE	APPLICABLE TO THIS PROJECT		PROJECT	GRADY ESTORIA URGENT CARE					
1705.1 Special Coats (work unusual in nature, including but not limited to alternative materials and systems, unusual design applications, materials and systems with special requirements, anchor spacing, edge distances, masonry unit, grout, masonry compressive strength, anchor embedment and tightening torque)		Submit final review, shop (3) and/or field inspection	N		b. Inspection tasks During Mechanical Fastening (Observe the QA tasks listed in SDI QA/QC, Appendix 1 Table 1.7)		Y		Observe (4)		2. Prior to grouting, verify that the following are in compliance:		b. Inspection tasks After Mechanical Fastening (Perform the QA tasks listed in SDI QA/QC, Appendix 1 Table 1.8)		Y		Perform (4)		1705.10 Fabricated Items	GRADY ESTORIA URGENT CARE			
1. Inspection of anchors post-installed in solid grouted masonry; Per research reports including verification of anchor type, anchor dimensions, hole size and depth, embedment procedures, anchor spacing, edge distances, masonry unit, grout, masonry compressive strength, anchor embedment and tightening torque		Field inspection	Y		a. Grout space	Field inspection	Y		Level 2 - Periodic		1. List of fabricated items requiring special inspection during fabrication:		a. Inspection tasks During Mechanical Fastening (Observe the QA tasks listed in SDI QA/QC, Appendix 1 Table 1.7)		N		As noted in each applicable shop activity		1705.12 Cold-formed Steel Special Bolted Moment Frames	GRADY ESTORIA URGENT CARE			
2. Aggregate Pier Inspection: The special inspector's responsibilities include, but are not limited to, review of the aggregate pier designer's use of soil parameters as presented in the project soil report, during construction, verification of aggregate properties, type and number of lifts of aggregate, hole size and depths and top surface elevations, and applied energy. Additionally, results of qualitative tests on proposed aggregate pier elements such as maximum loading, uplift pull-out testing, bottom stabilization tests and dynamic cone penetration tests shall be reviewed to verify compliance with design specifications		Field inspection	N		b. Placement of prestrengthen tendons and anchorages	Field inspection	N		Level 3 - Continuous		2. List of fabricated items to be fabricated on the premises of a fabrication shop to be used such work without special inspection (including name of approved agency providing periodic auditing):		b. Inspection tasks After Mechanical Fastening (Perform the QA tasks listed in SDI QA/QC, Appendix 1 Table 1.8)		N				1705.13 Structural Steel Testing for Seismic Resistance	GRADY ESTORIA URGENT CARE			
1705.2.3 Open-Web Steel Joists and Joist Girders		1. Installation of open-web steel joists and joist girders.		Y		c. Inspection tasks After Mechanical Fastening (Perform the QA tasks listed in SDI QA/QC, Appendix 1 Table 1.8)		Y		Perform (4)		3. Verify compliance of the following during construction:		1. Inspection during welding operations of elements of the main windforce-resisting system		Field inspection		N	Continuous	1705.14 Structural Wood Special Inspections For Wind Resistance	GRADY ESTORIA URGENT CARE		
1705.2.4 Cold-formed Steel Trusses Spanning 60 feet or Greater		Verify temporary and permanent restraint/tracing are installed in accordance with the approved truss submittal package		Field inspection		d. Type, size, location of anchors, including other details of anchorage, relative to structural members, frames, or other construction		N				2. Inspection of railing, anchoring and other fastening of components within the main windforce-resisting system		Shop (3) and field inspection		N		Periodic		1705.15 Cold-formed Steel Special Inspections For Wind Resistance	GRADY ESTORIA URGENT CARE		
1705.3 Concrete Construction		1. Inspection and placement verification of reinforcing steel and prestressing tendons.		Shop (3) and field inspection		e. Welding of reinforcement		Y		Periodic		3. Inspection during welding operations of elements of the main windforce-resisting system		Shop (3) and field inspection		N		Periodic		1705.16 Seismic Certification of Nonstructural Components	GRADY ESTORIA URGENT CARE		
1. Fabrication and erection documents (Verify reports and certificates as listed in AISC 360, chapter N, paragraph 3.2 for compliance with construction documents)		Submit Review	Y		2. Reinforcing bar welding:		N				4. Preparation, construction, and protection of masonry during cold weather (temperature below 40°F) or hot weather (temperature above 90°F)		Field inspection		Y		Periodic		1705.17 Seismic Certification of Designated Seismic Systems	GRADY ESTORIA URGENT CARE			
2. Material verification of structural steel		Shop (3) and field inspection	Y		a. Verification of weldability of bars other than ASTM A706.		N				5. Condition of finished application		Shop (3) and field inspection		N		Periodic		1705.18 Seismic Isolation Systems	GRADY ESTORIA URGENT CARE			
3. Structural steel welding:		Y			b. Inspection of single-pass fillet welds 5/16" or less in size.		N				6. Field gluing operations of elements of the seismic-force-resisting system for SDC C, D, E or F.		Field inspection		N		Periodic		1705.19 Fire-resistant Materials	GRADY ESTORIA URGENT CARE			
a. Inspection tasks Prior to Welding (Observe or perform for each welded joint or member, the QA tasks listed in AISC 360, Table N5-4-1)		Shop (3) and field inspection	Y		c. Inspection of all other welds.		N				7. Nondestructive testing of structural members, frames, or other construction		Field inspection		N		Continuous		1705.20 Fire-resistant Joint Systems	GRADY ESTORIA URGENT CARE			
b. Inspection tasks During Welding (Observe or perform for each welded joint or member, the QA tasks listed in AISC 360, Table N5-4-2)		Shop (3) and field inspection	Y		d. Verification of weldability of bars other than ASTM A706.		N				8. Nondestructive testing of structural members, frames, or other construction		Field inspection		N		Periodic		1705.21 Structural Steel Special Inspections For Seismic Resistance	GRADY ESTORIA URGENT CARE			
c. Inspection tasks After Welding (Observe or perform for each welded joint or member, the QA tasks listed in AISC 360, Table N5-4-3)		Shop (3) and field inspection	Y		e. Inspection of all other welds.		N				9. Inspection of anchors cast in concrete.		Field inspection		Y		Continuous		1705.22 Structural Wood Special Inspections for Seismic Resistance	GRADY ESTORIA URGENT CARE			
d. Nondestructive testing (NDT) of welded joints: see <i>Commentary</i>		Y			f. Application and measurement of prestressing force		N				10. Verify preparation of grout specimens, mortar specimens, and/or prisms		Field inspection		Y		Periodic		1705.23 Cold-formed Steel Light-Frame Construction Special Inspections for Seismic Resistance	GRADY ESTORIA URGENT CARE			
1) Complete penetration of penetration groove welds 5/16" or greater in risk category III or IV		Shop (3) or field inspection	N		g. Placement of grout and prestressing grout for bonded tendons in compliance		N				11. For high-load diaphragms, verify grade and thickness of structural panel sheathing agree with approved building plans.		Field inspection		N		Periodic		1705.24 Sprayed Fire-resistant Materials	GRADY ESTORIA URGENT CARE			
2) Complete penetration of penetration groove welds 5/16" or greater in risk category II		Shop (3) or field inspection	Y		h. Placement of grout and prestressing grout for bonded tendons in compliance		N				12. Nondestructive testing of structural members, frames, or other construction		Field inspection		N		Periodic		1705.25 Mastic and Intumescent Fire-Resistant Coatings	GRADY ESTORIA URGENT CARE			
3) Welded joints subject to fatigue when required by AISC 360, Appendix 3, Table A-3.1		Shop (3) or field inspection	Y		i. Placement of AAC masonry units in thin-bed mortar joints		N				13. Nondestructive testing of structural members, frames, or other construction		Field inspection		N		Continuous		1705.26 Fire-resistant Penetrations and Joints	GRADY ESTORIA URGENT CARE			
4) Fabricator's NDT reports when fabricator performs NDT		Verify reports	Y		j. Required for the first 5,000 square feet		N				14. Nondestructive testing of structural members, frames, or other construction		Field inspection		N		Periodic		1705.27 Exterior Insulation and Finish Systems (EIFS)	GRADY ESTORIA URGENT CARE			
4. Structural steel bolting:		Shop (3) and field inspection	Y		k. Required after the first 5,000 square feet		N																




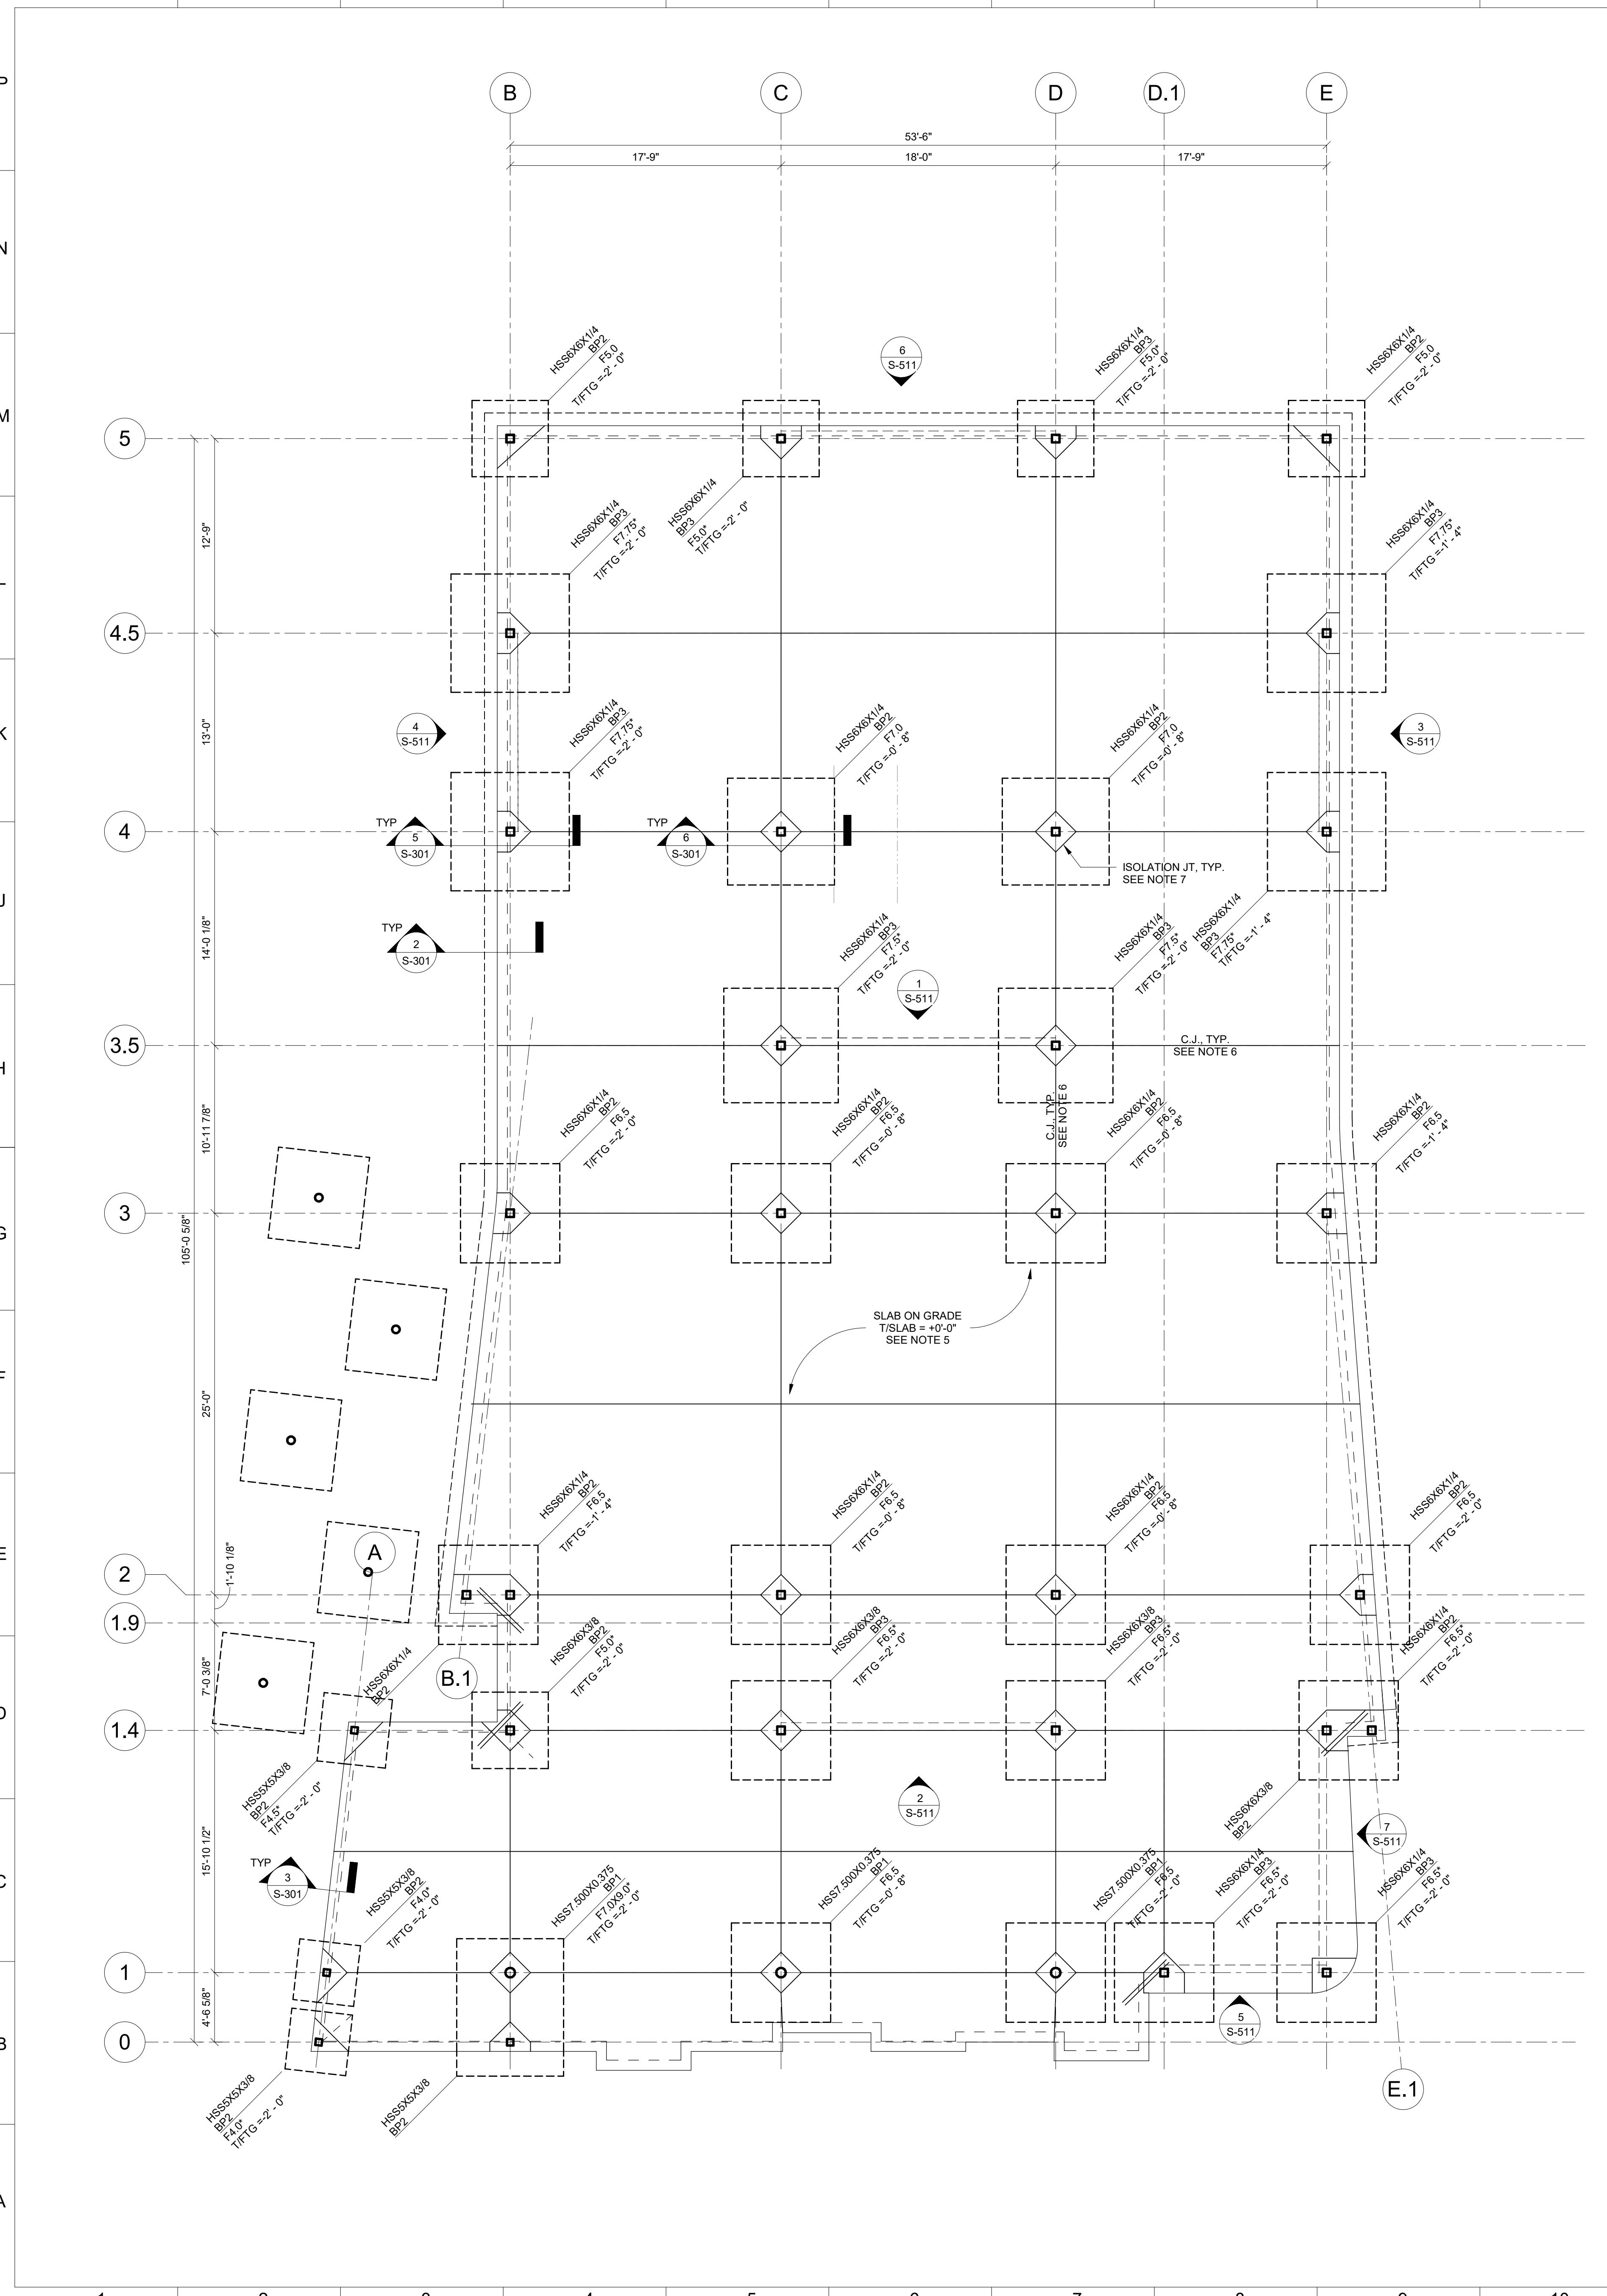


16 TYPICAL SLAB REINFORCEMENT AT PIPING GROUPINGS (3 OR MORE)
S-301 3/4" = 1'-0"

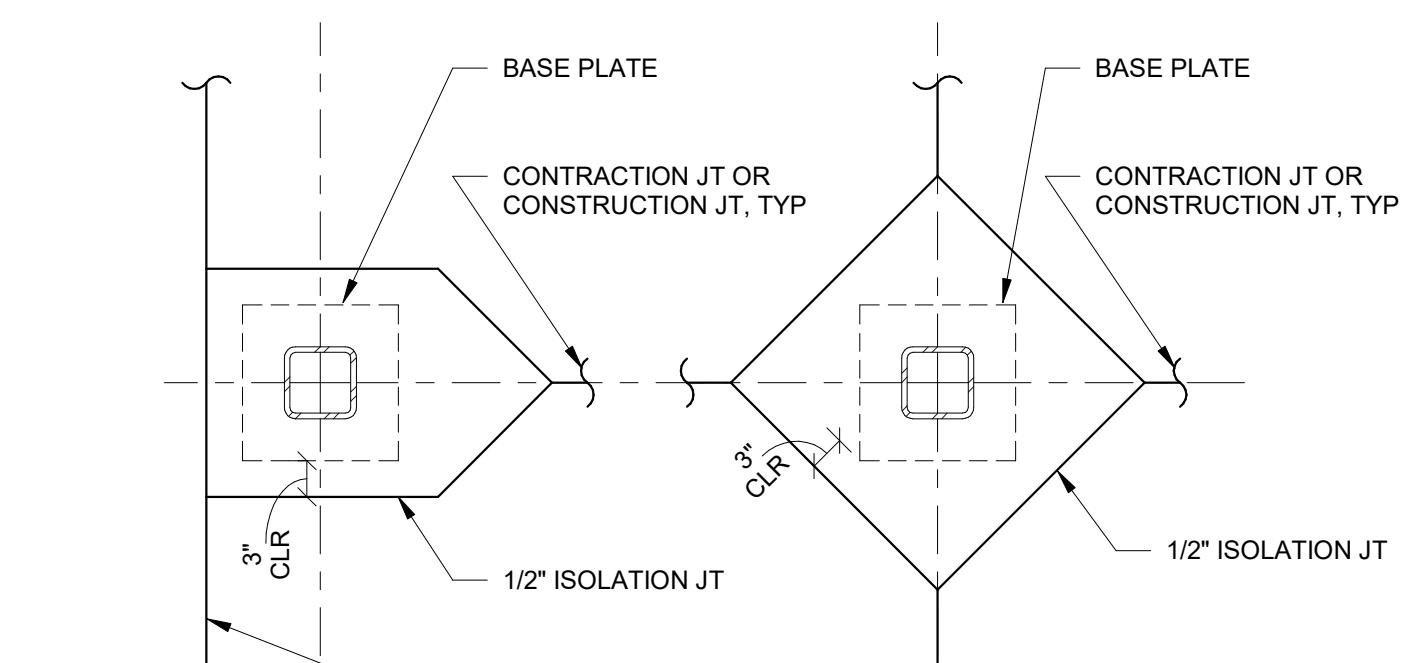

12 TYPICAL ISOLATION JOINT AT STEEL COLUMN
S-301 3/4" = 1'-0"

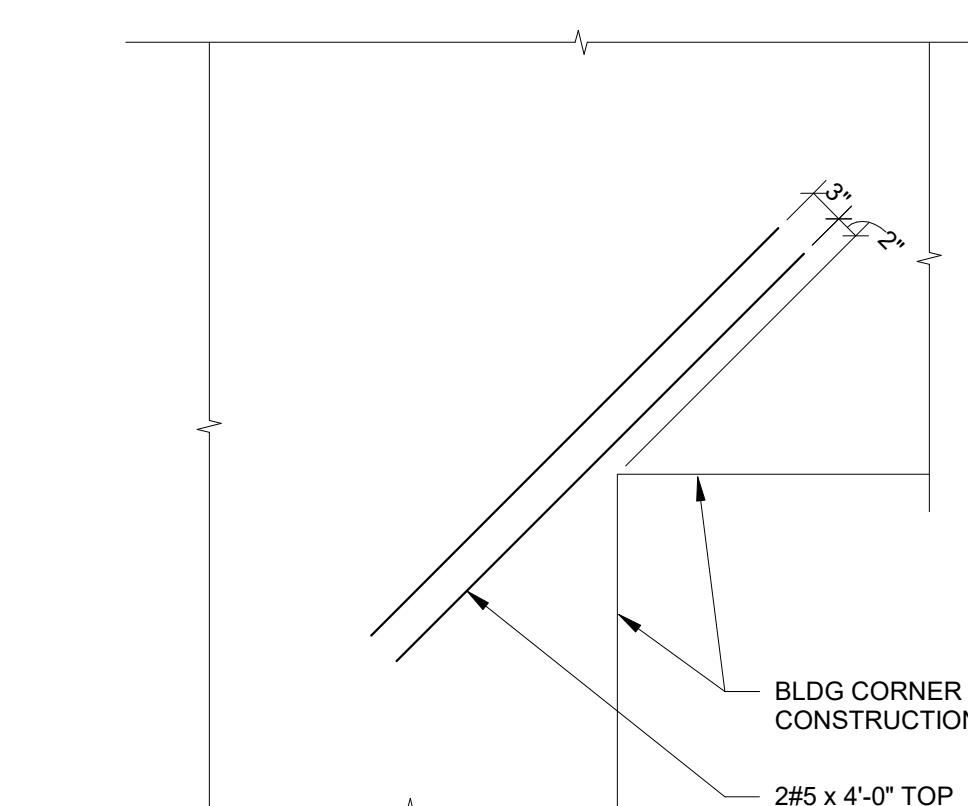


8 TYPICAL REINFORCEMENT AT SLAB RE-ENTRANT CORNER
S-301 3/4" = 1'-0"

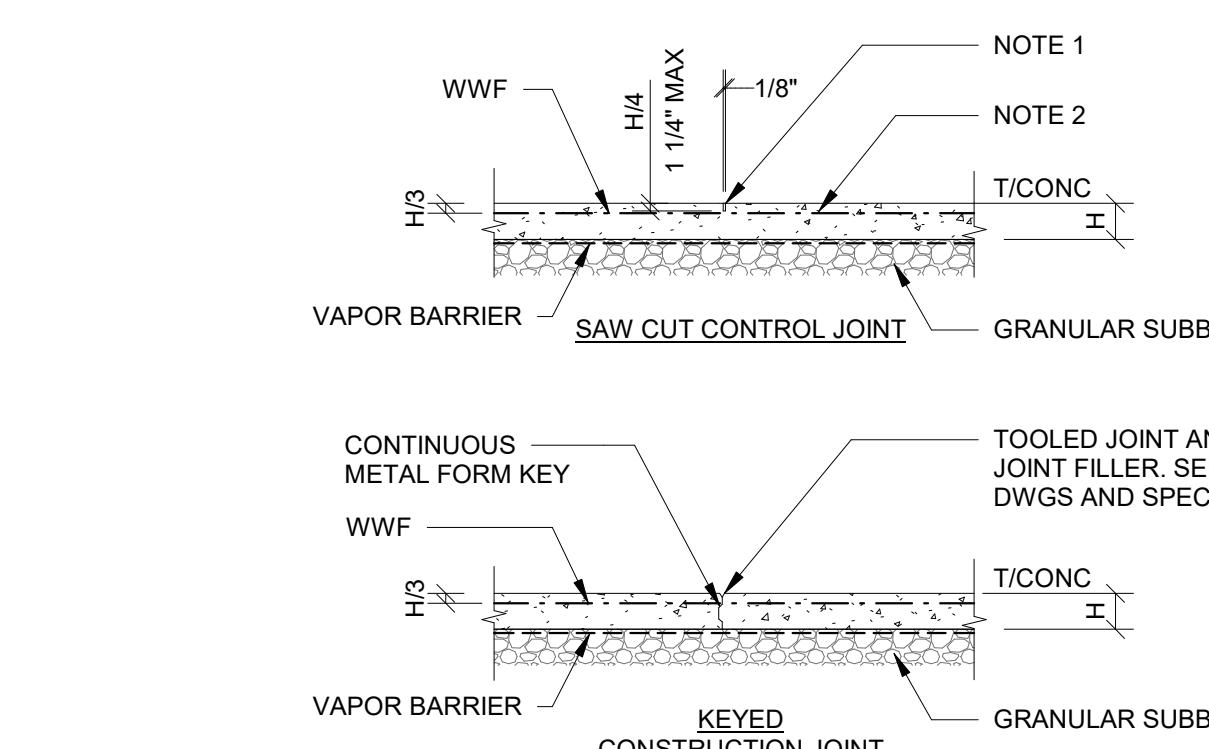


NOTE:
1. SAW CUT SHALL BE MADE SOON ENOUGH TO PREVENT CRACKING, BUT NOT SO SOON AS TO CAUSE SPALLING OF THE CONCRETE WHILE SAWING. FOR JOINT SPACING, SEE ARCHITECTURAL DRAWINGS AND SPECIFICATIONS. FOR JOINT FILLER, SEE STRUCTURAL SPECIFICATIONS.
2. SAW CUT OR DISCONTINUOUS REINFORCING AT CONSTRUCTION JOINTS.
3. 1/2" ISOLATION JOINTS NECESSARY AT CONSTRUCTION JOINTS AT EXPOSED EDGES DURING POURING.
4. WHERE REQUIRED FOR SUCCESSFUL INSTALLATION OF FLOOR FINISH, SLAB SHALL BE WET CURED AND BE PLACED A MINIMUM OF 90 DAYS PRIOR TO INSTALLATION OF FLOOR FINISHES. AT CONTRACTOR'S OPTION DIAMOND DOWELS MAY BE USED IN LIEU OF CONTINUOUS CONCRETE KEY AT KEYED JOINT.
5. PROVIDE SLAB BOLSTERS A MAX 2'-0" APART FOR WWF SUPPORT


4 TYPICAL GRADE SUPPORTED SLAB AT JOINTS
S-301 3/4" = 1'-0"

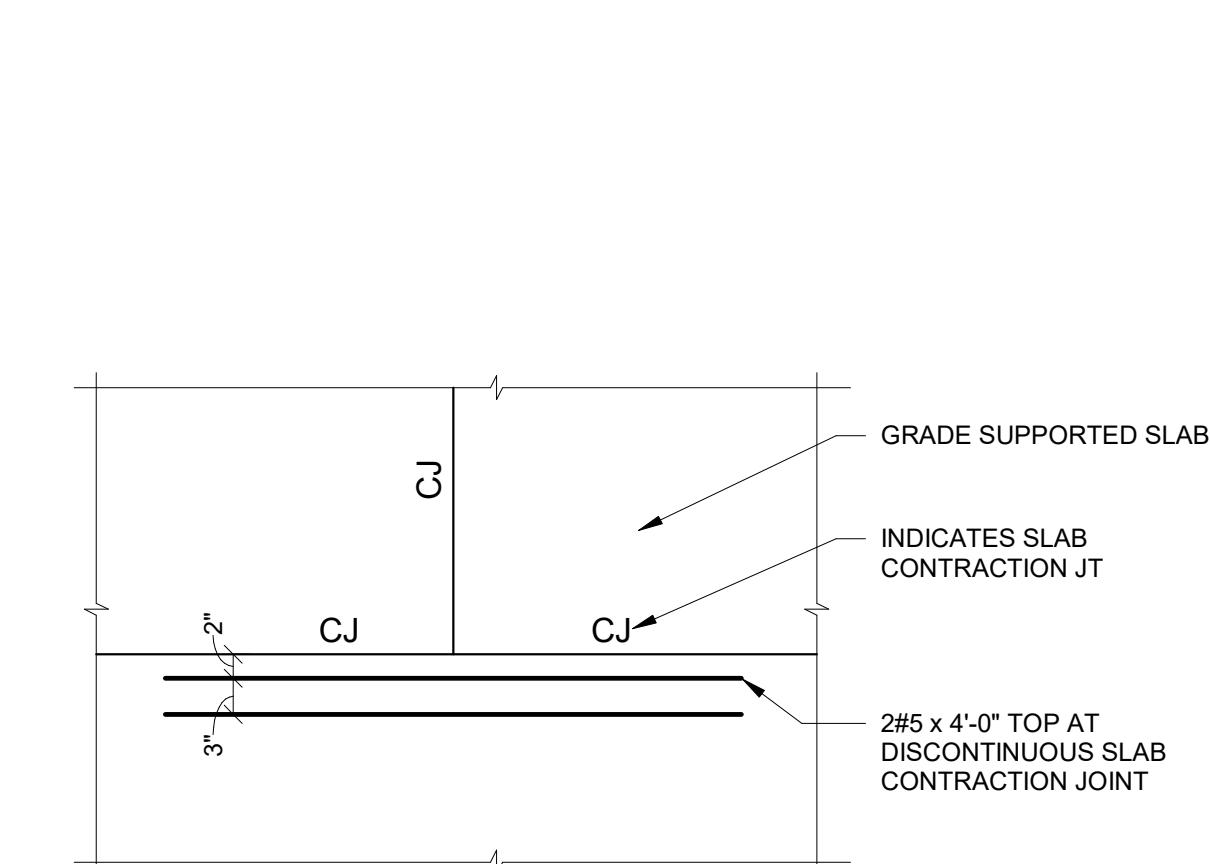



11 TYPICAL REINFORCEMENT AT DISCONTINUOUS CONTRACTION JOINT
S-301 3/4" = 1'-0"

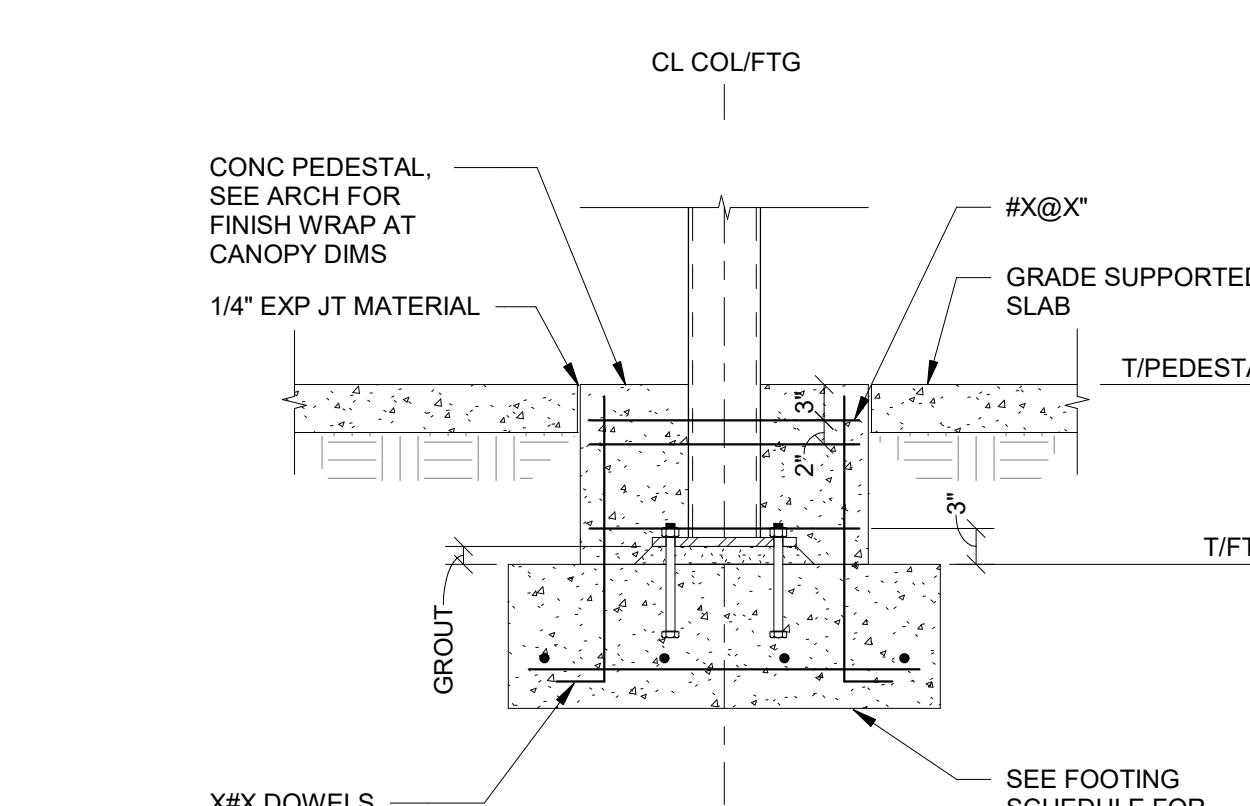


7 TYPICAL STEEL CANOPY COLUMN FOOTING
S-301 3/4" = 1'-0"

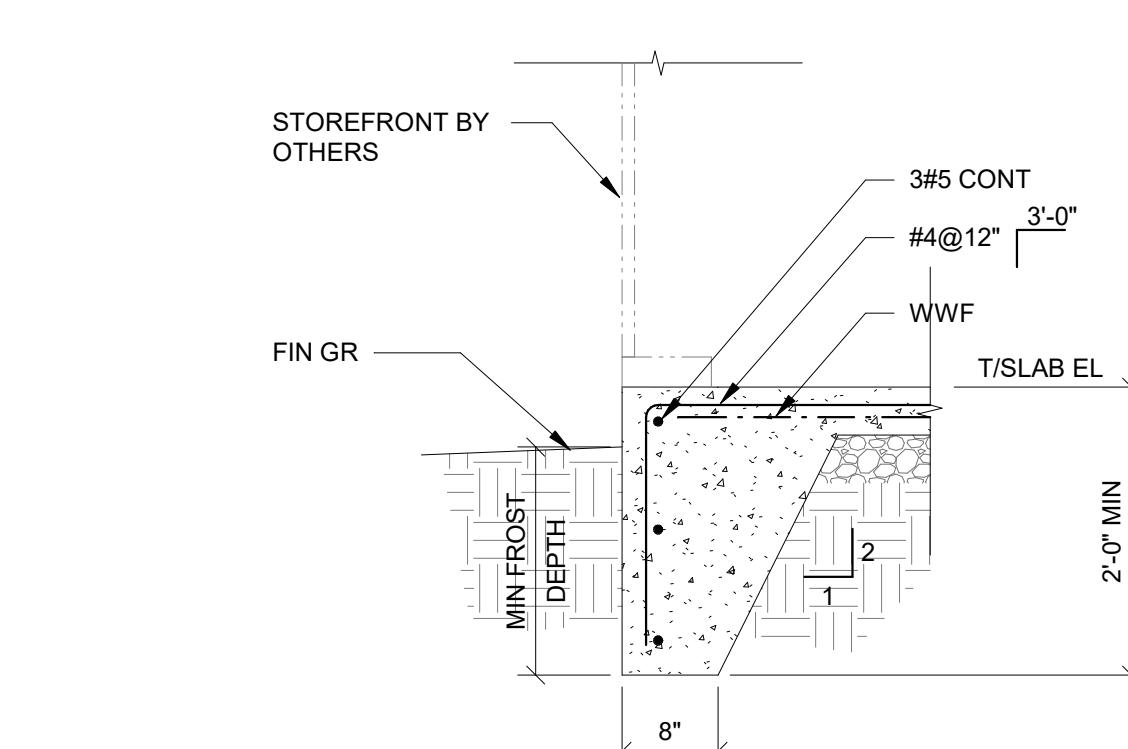

3 TYPICAL TURNDOWN SLAB
S-301 3/4" = 1'-0"

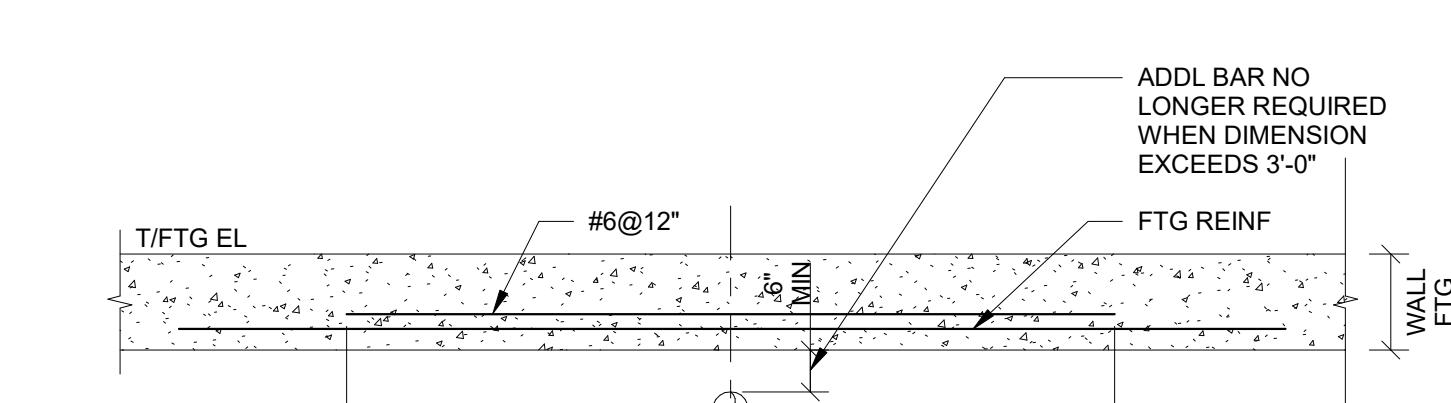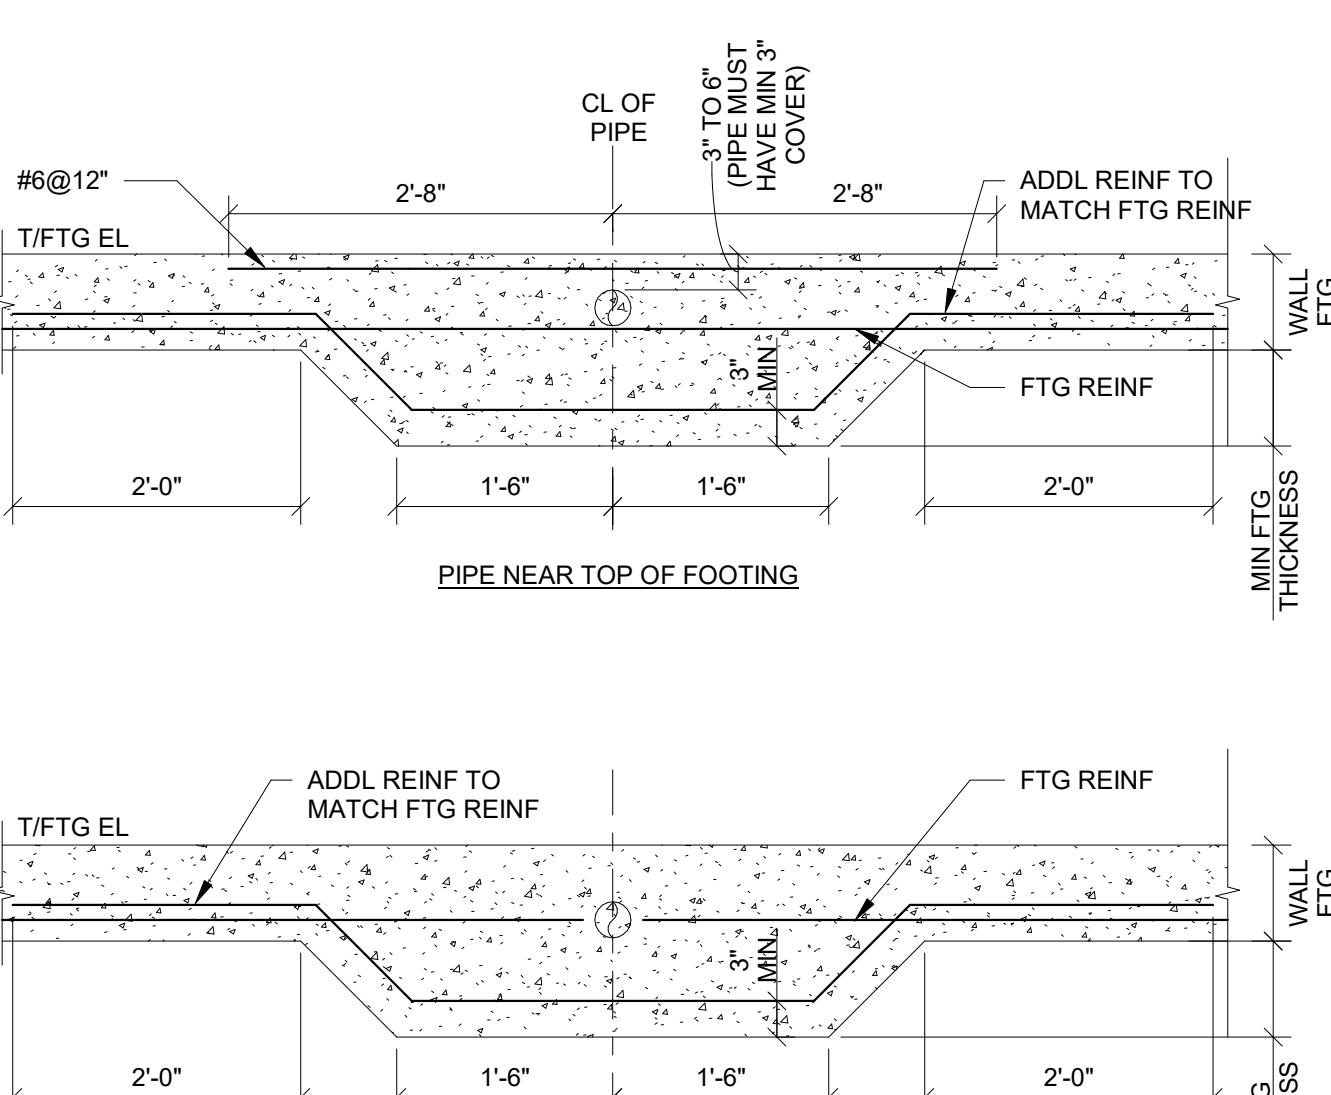

6 TYPICAL INTERIOR STEEL COLUMN FOOTING
S-301 3/4" = 1'-0"

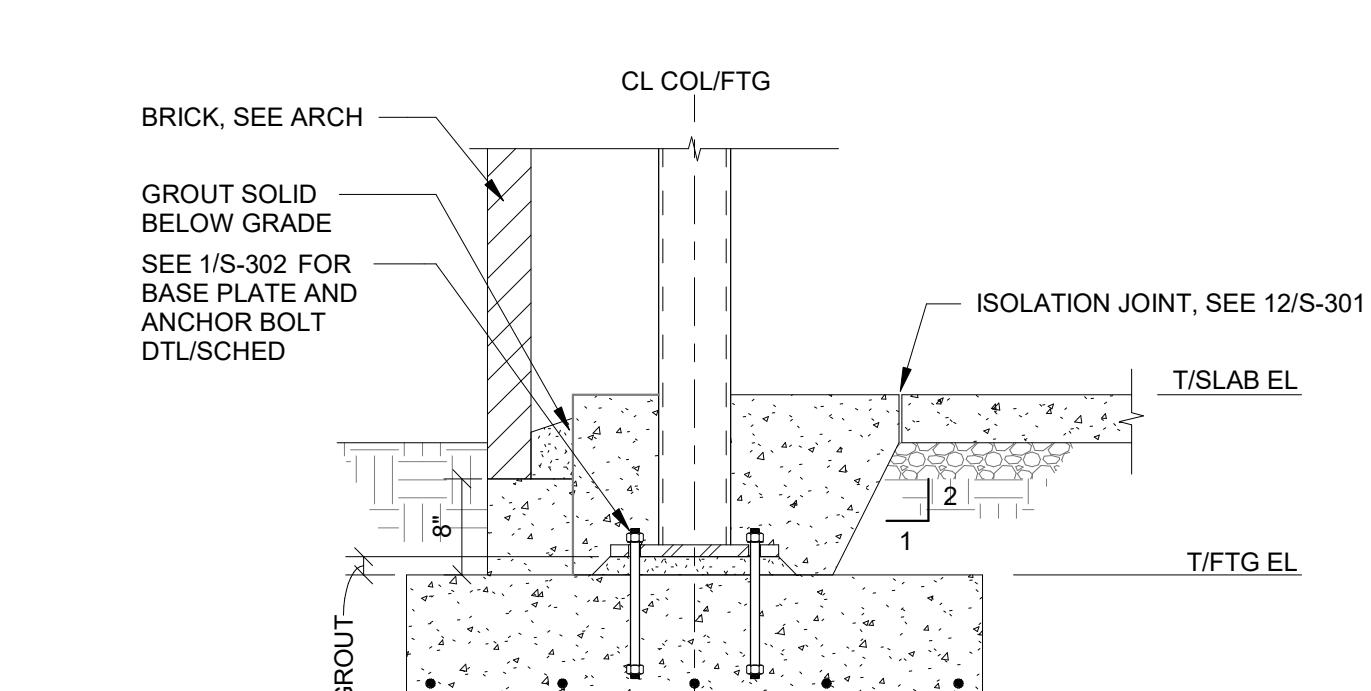

2 TYPICAL TURNDOWN SLAB AT BRICK LEDGE
S-301 3/4" = 1'-0"

FOOTING SCHEDULE			
MARK	SIZE (WxLxT)	REINF	REMARKS
F4.0"	4'-0"x4'-0"x12"	6#4 EW	TOP & BOTTOM
F4.5"	4'-6"x4'-6"x12"	6#4 EW	TOP & BOTTOM
F5.0	5'-0"x5'-0"x15"	6#5 EW	BOTTOM
F5.0"	5'-0"x5'-0"x15"	6#5 EW	TOP & BOTTOM
F6.5	6'-6"x6'-6"x15"	7#5 EW	BOTTOM
F6.5"	6'-0"x7'-0"x15"	7#5 EW	TOP & BOTTOM
F7.0	7'-0"x7'-0"x15"	6#6 EW	BOTTOM
F7.0.9x9.0"	7'-0"x9'-0"x15"	6#6 LW 8#6 SW	TOP & BOTTOM
F7.5"	7'-6"x7'-6"x15"	6#6 EW	TOP & BOTTOM
F7.75"	7'-9"x7'-9"x15"	6#6 EW	TOP & BOTTOM

1 FOOTING SCHEDULE
S-301 3/4" = 1'-0"

PROJECT NO:	25132.00
DD PACKAGE	12/18/25



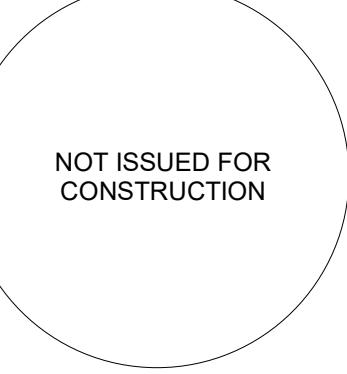


PLATE WASHER SCHEDULE:	
BOLT DIA	PLATE WASHER
1" OR LESS	3/8" x 3/8"
1 1/4"	3 1/2" x 3 1/2" x 5/8"
1 1/2"	3 3/4" x 3 3/4" x 5/8"

SHEET TITLE

FOUNDATION DETAILS




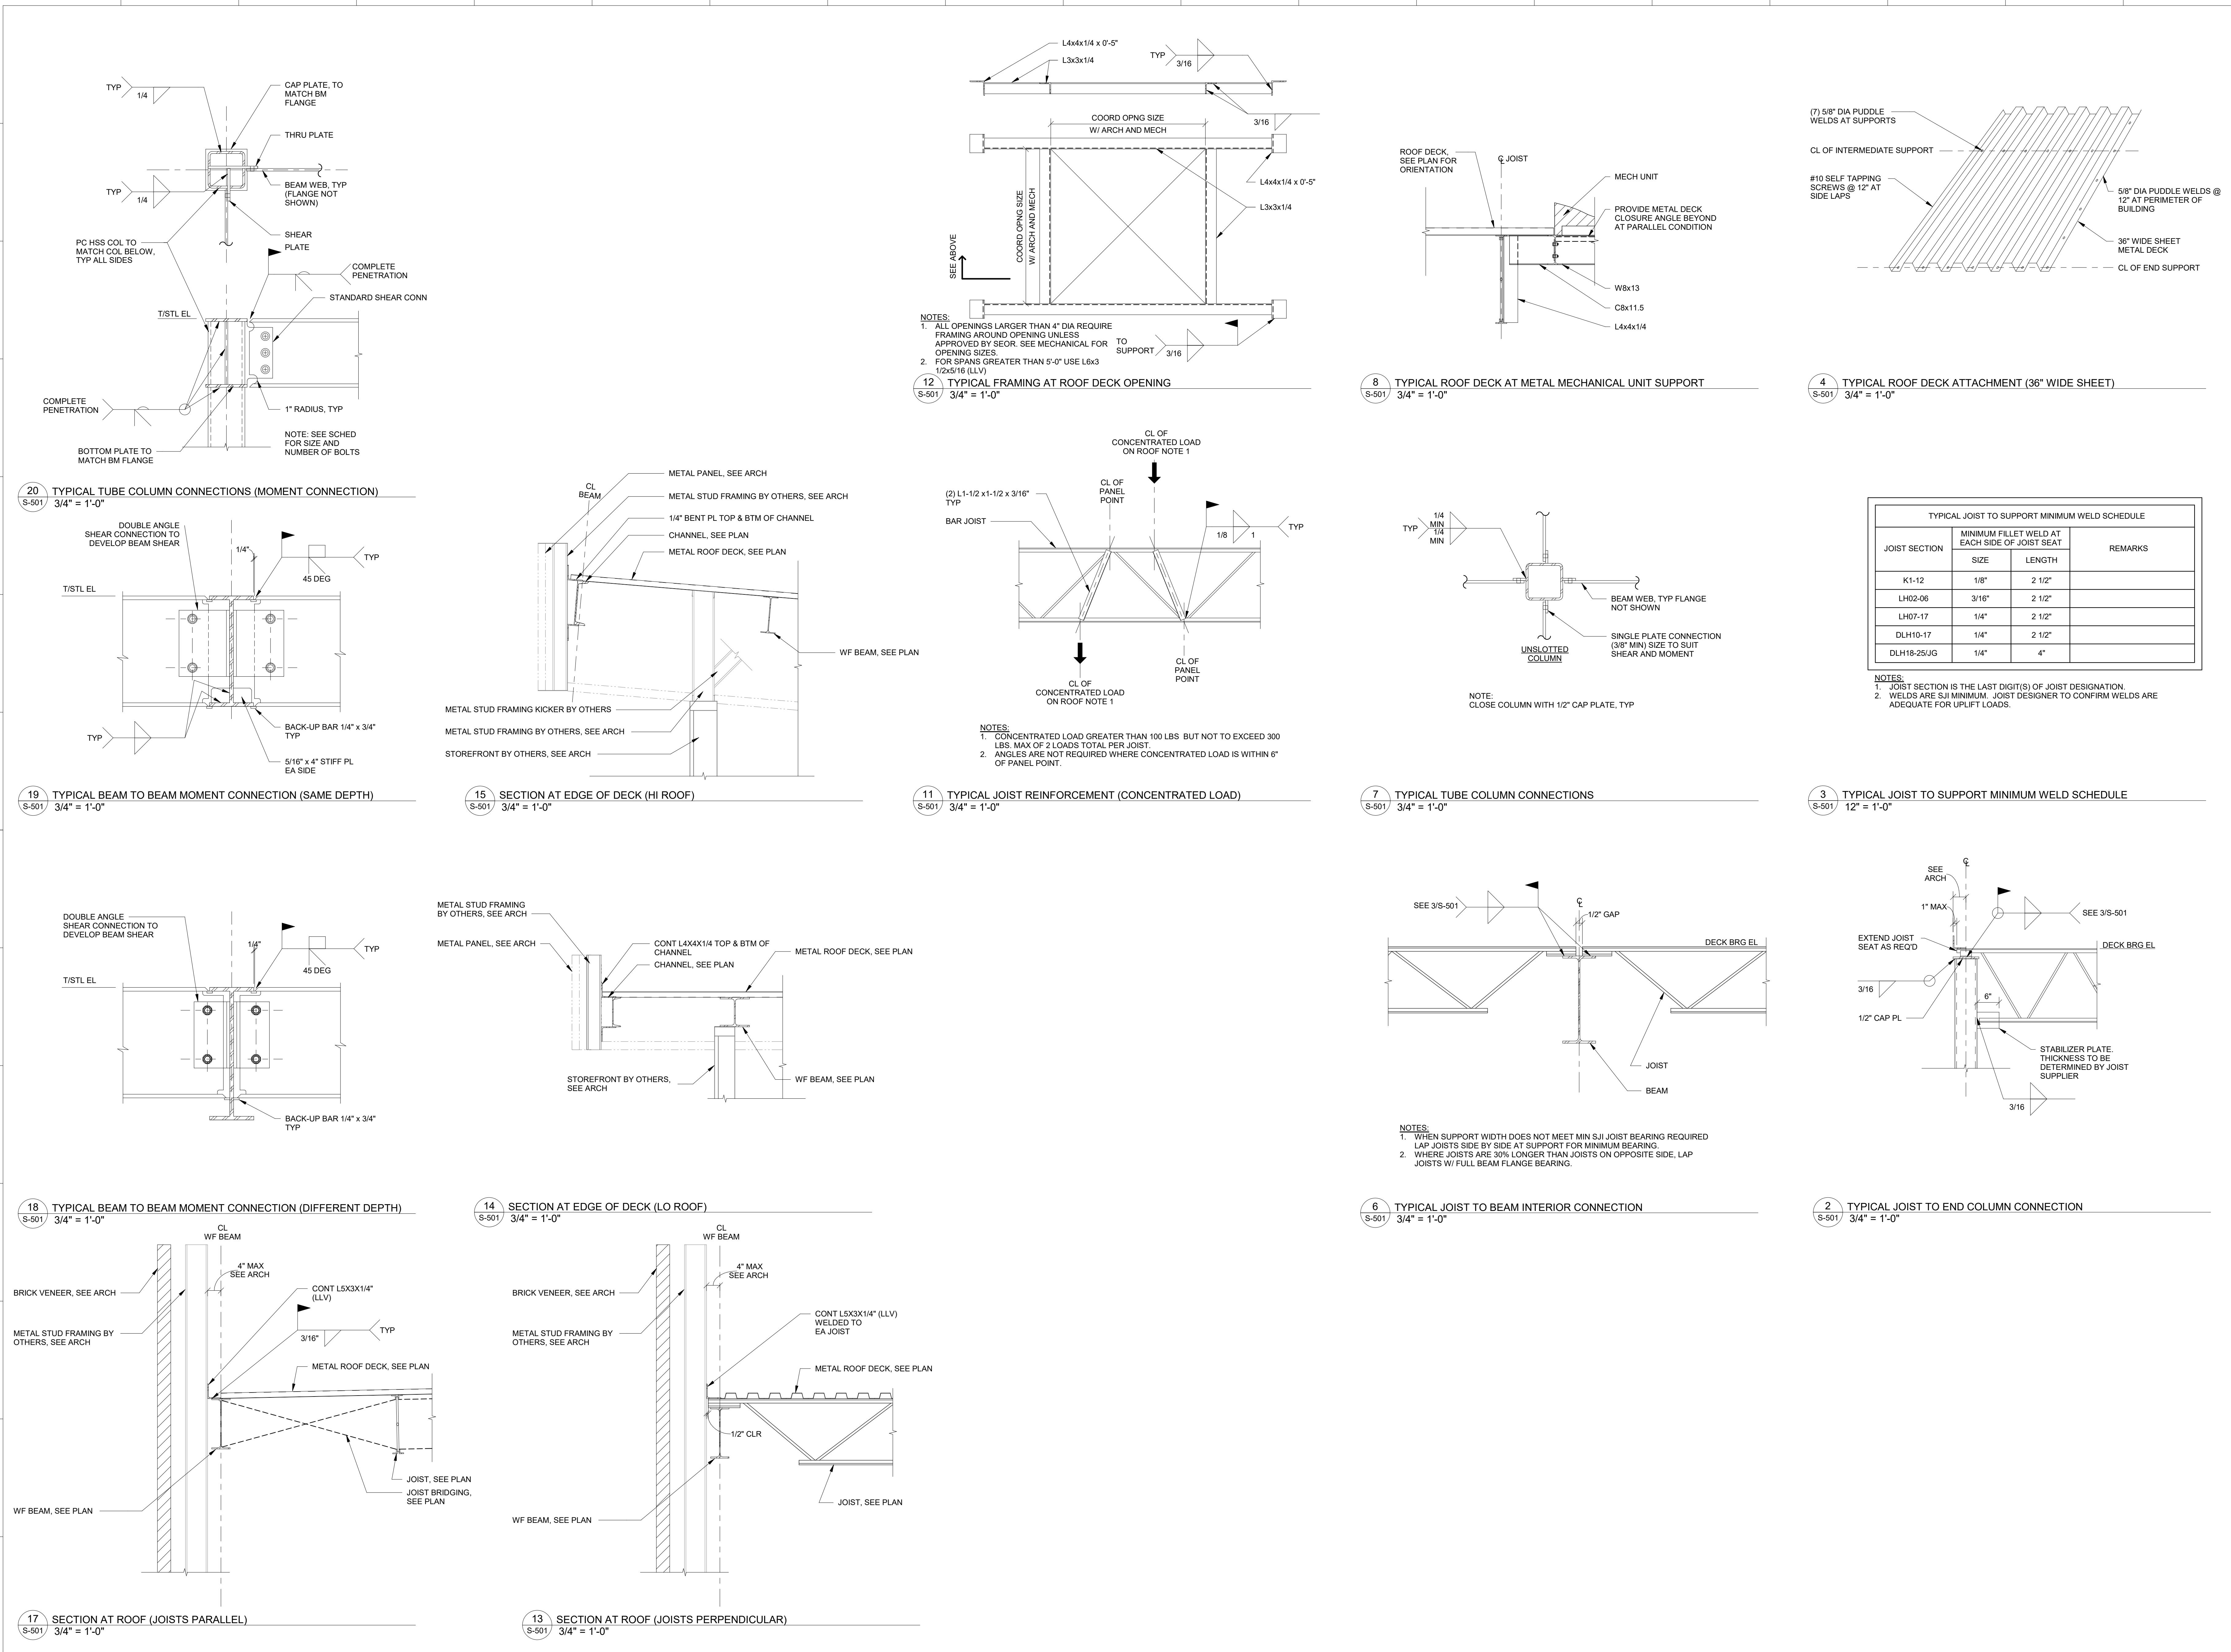


NOTES:

1. ALL BRACED FRAME CONNECTIONS SHALL BE DESIGNED BY STEEL FABRICATOR.
2. ALL BRACED FRAME CONNECTIONS SHALL BE DESIGNED FOR AXIAL TENSION, AXIAL COMPRESSION, AND SHEAR FORCES SHOWN.
3. $F = \pm k$ INDICATES AXIAL TENSION AND COMPRESSION FORCE IN KIPS (SERVICE) IN THE MEMBER.
4. "T" INDICATES SHEAR FORCE (SERVICE) IN BEAM MEMBERS. IF SHEAR FORCE IS NOT INDICATED, DESIGN FORCE SHALL BE OBTAINED BY TABLES ENTITLED MAXIMUM TOTAL UNIFORM LOAD IN PART 3 OF THE AISC MANUAL OF STEEL CONSTRUCTION, FIFTEENTH (15) EDITION. DESIGN REACTION IS EQUAL TO HALF TABULATED VALUE OF NON-COMPOSITE BEAMS AND EQUAL TO THE TABULATED VALUE OF COMPOSITE BEAMS.
5. SEE PLAN FOR T/STL ELEVATIONS. SEE PLAN FOR MEMBER SIZES NOT SHOWN.


4 TYPICAL BRACED FRAME NOTES
S-502 3/4" = 1'-0"

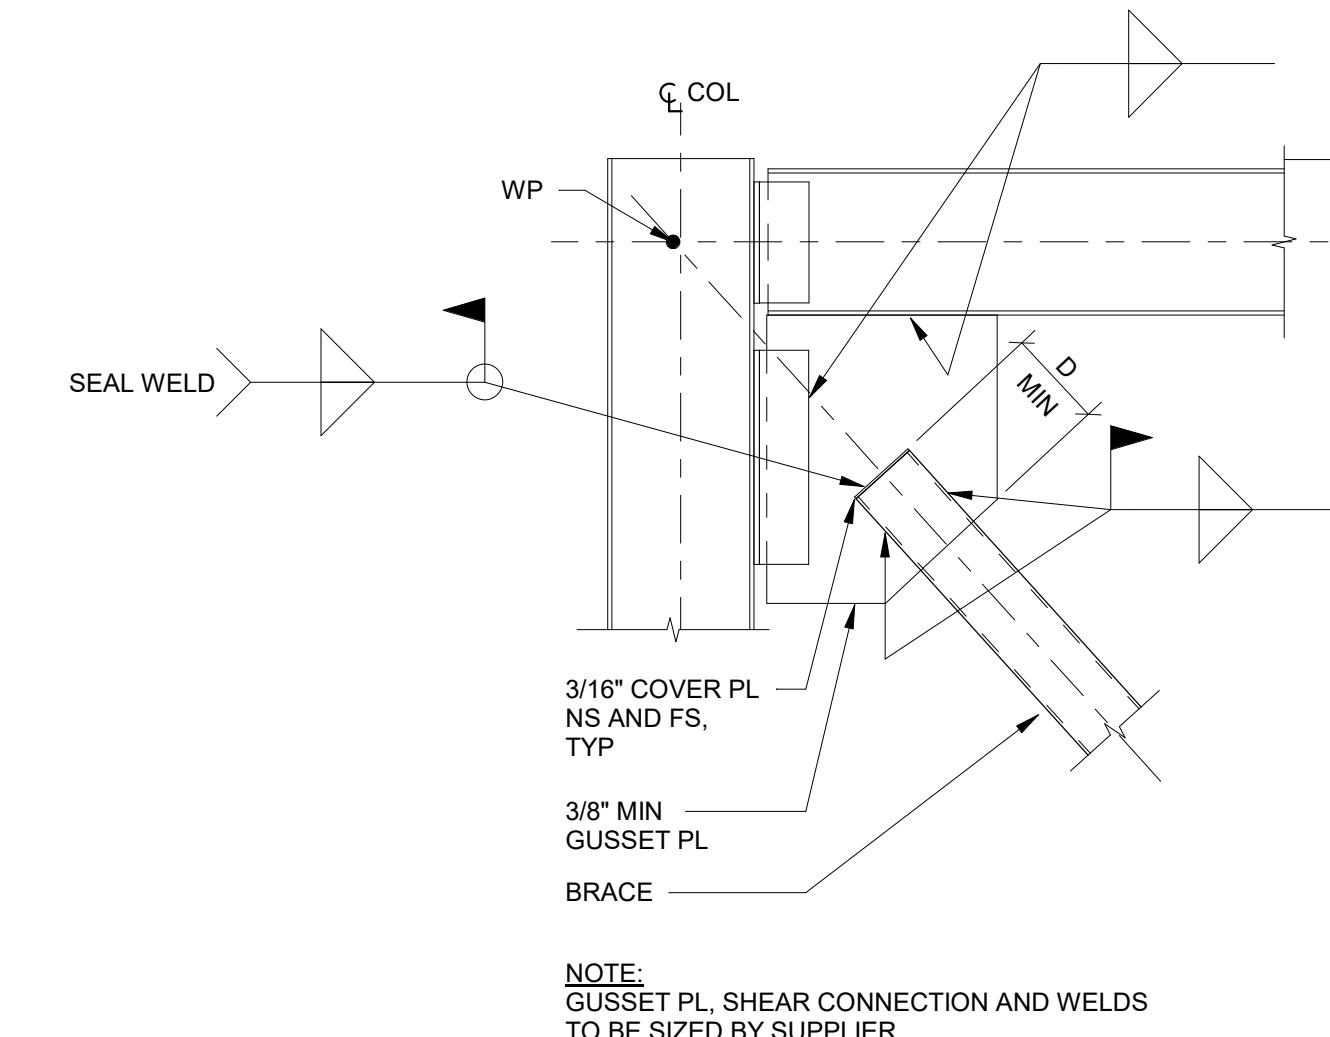

3 TYPICAL VERTICAL BRACE AT END COLUMN AT ROOF
S-502 3/4" = 1'-0"

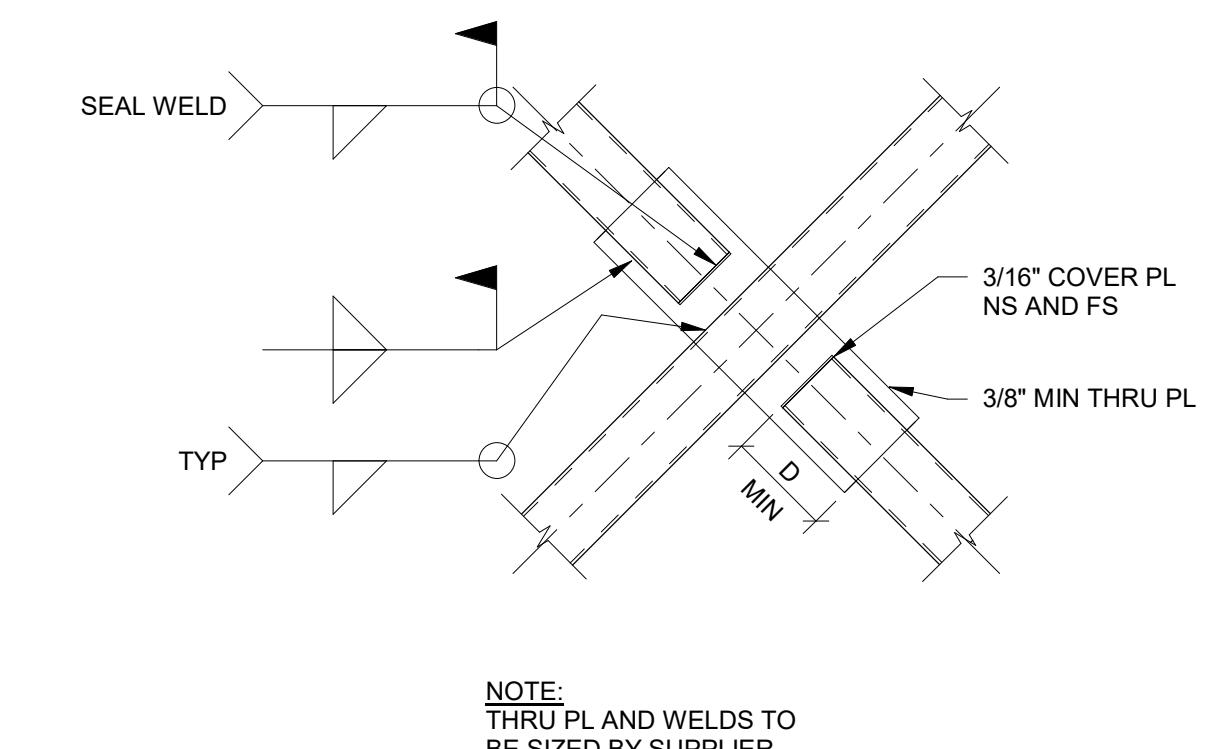








2 TYPICAL VERTICAL BRACE INTERSECTION
S-502 3/4" = 1'-0"

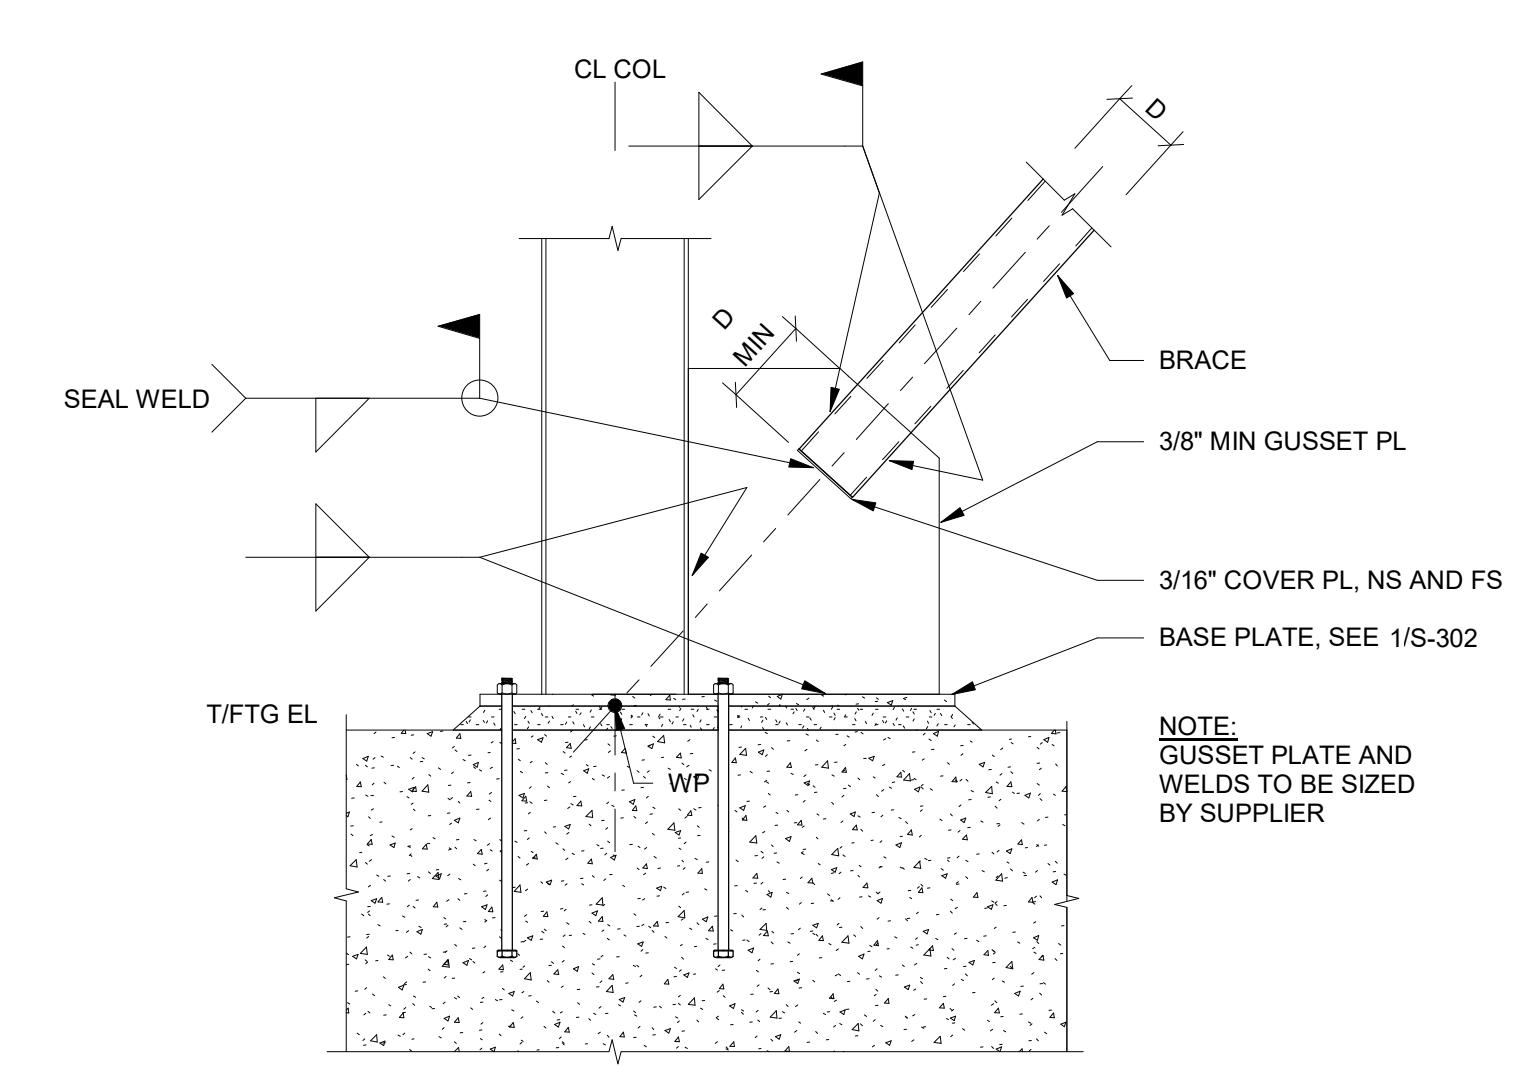

1 TYPICAL VERTICAL BRACE AT FOUNDATION
S-502 3/4" = 1'-0"

P
N
M
L
K
J
H
G
F
E
D
C
B
A

12/18/25 10:30:23 AM

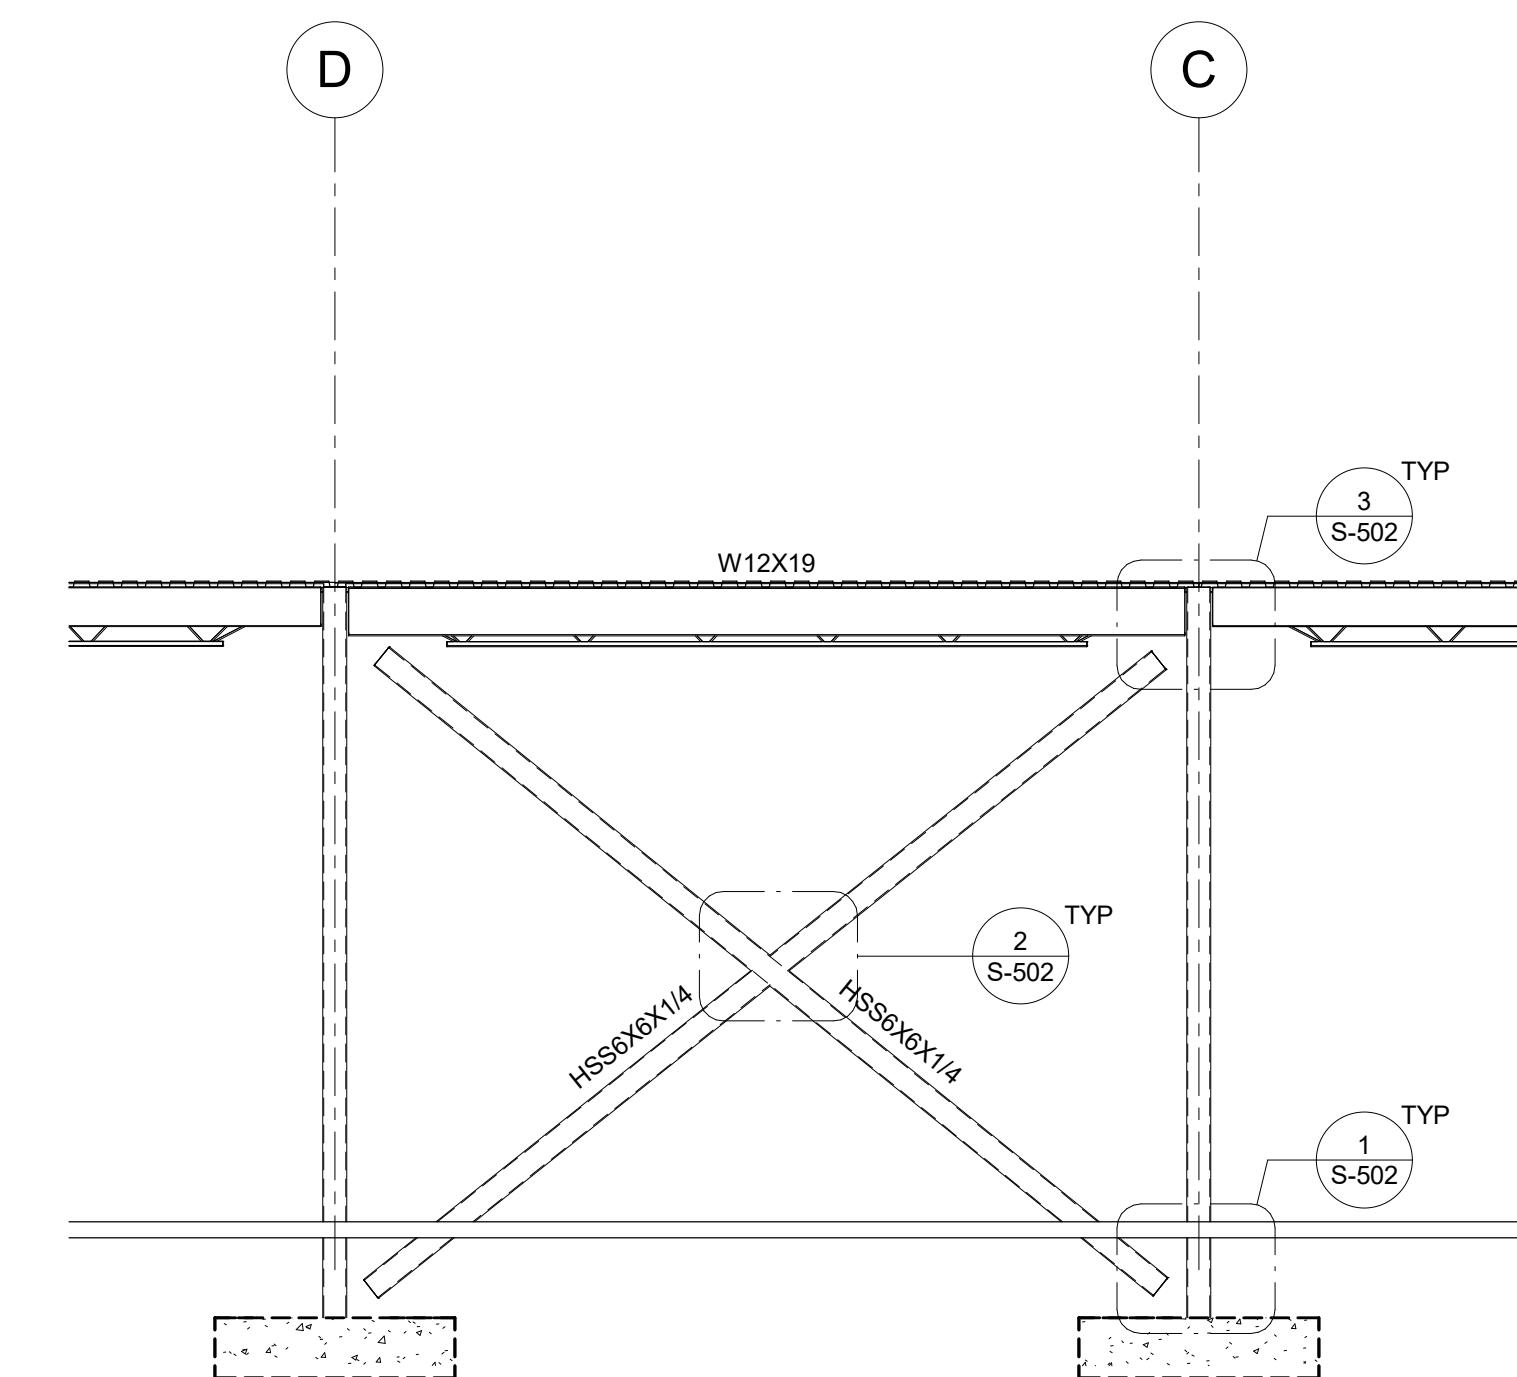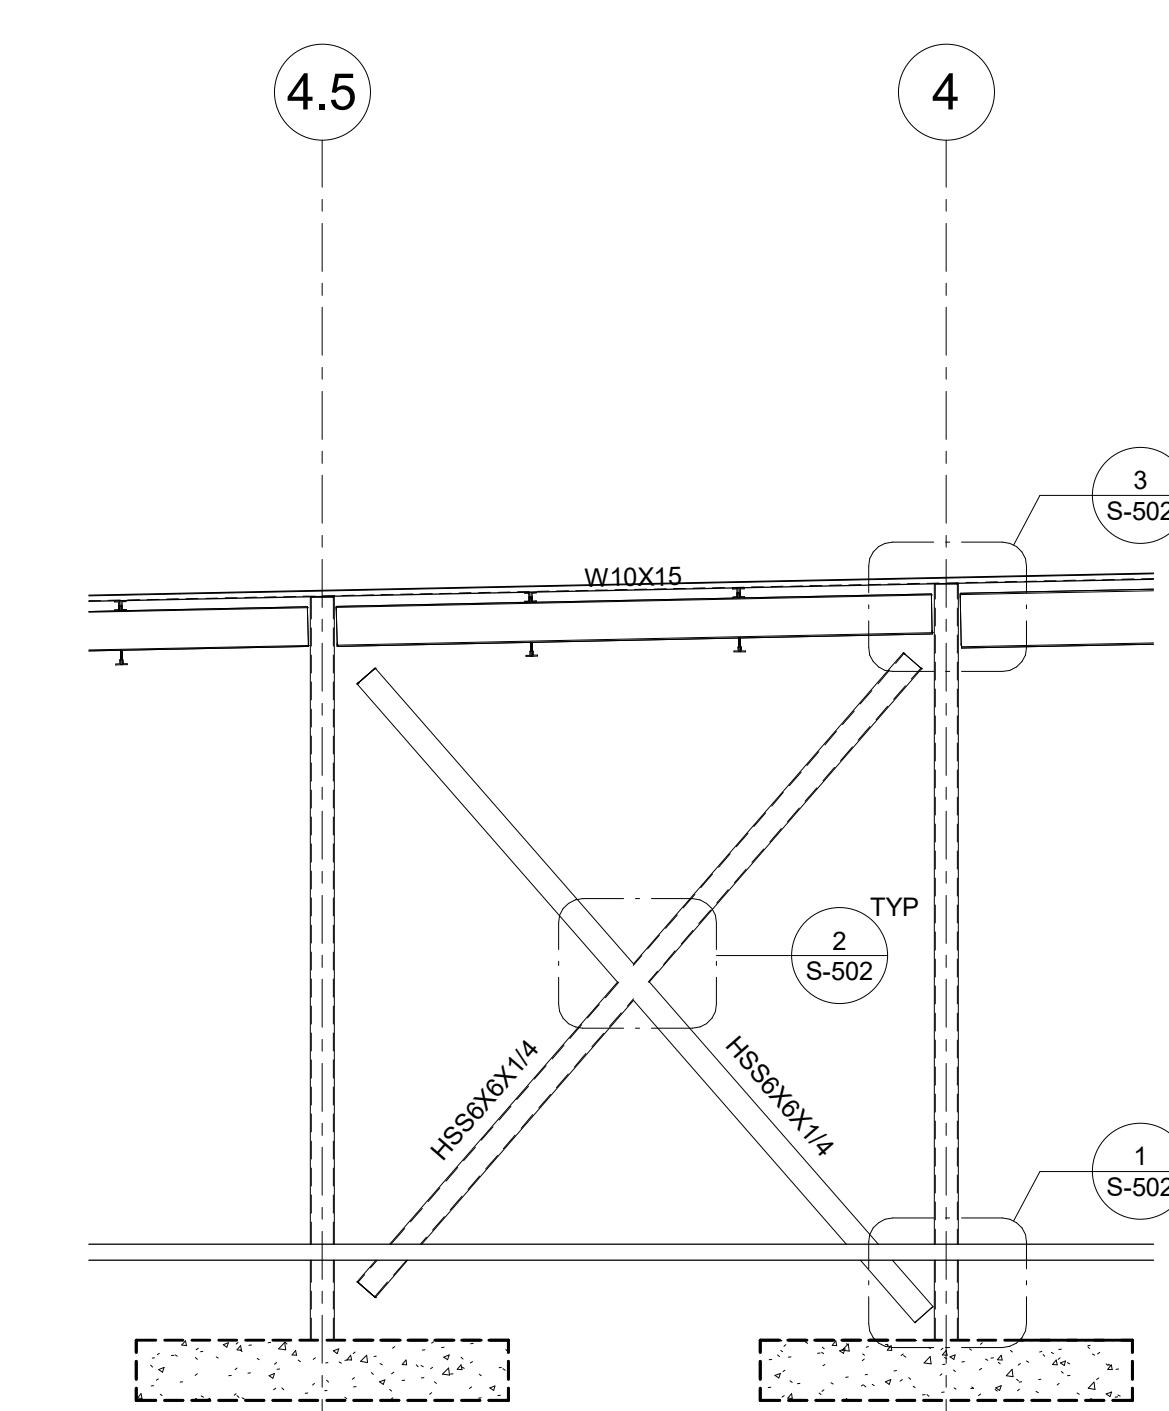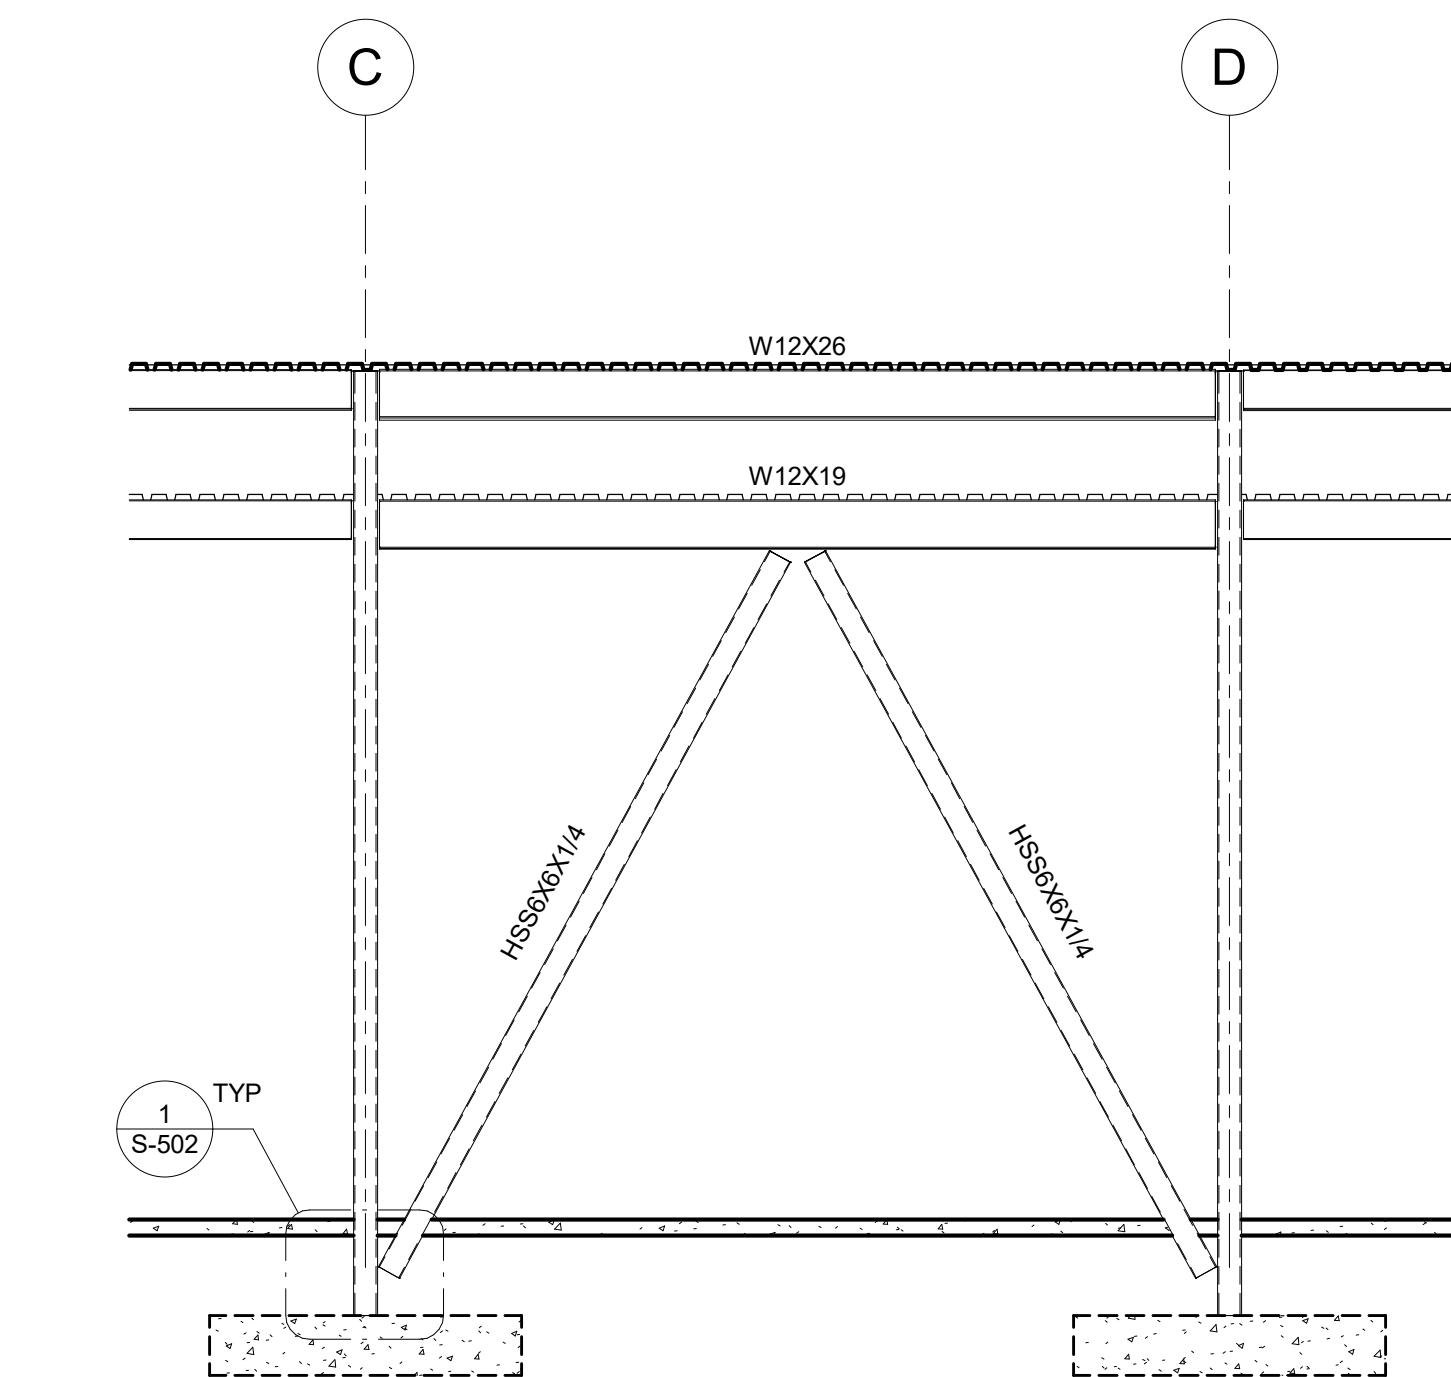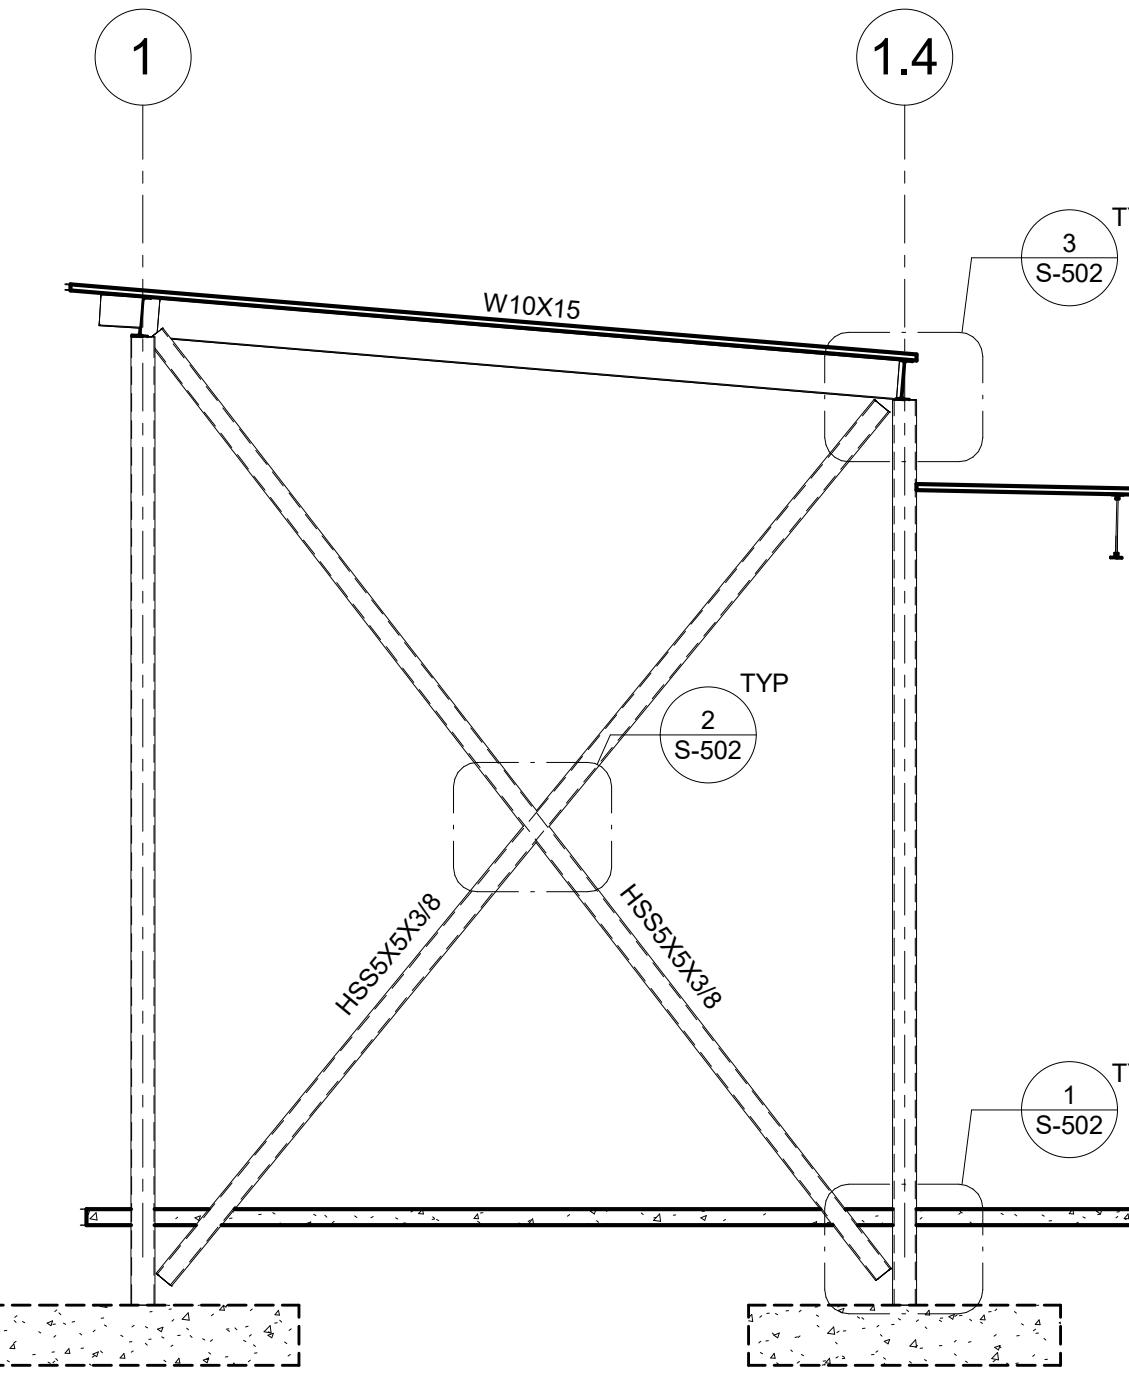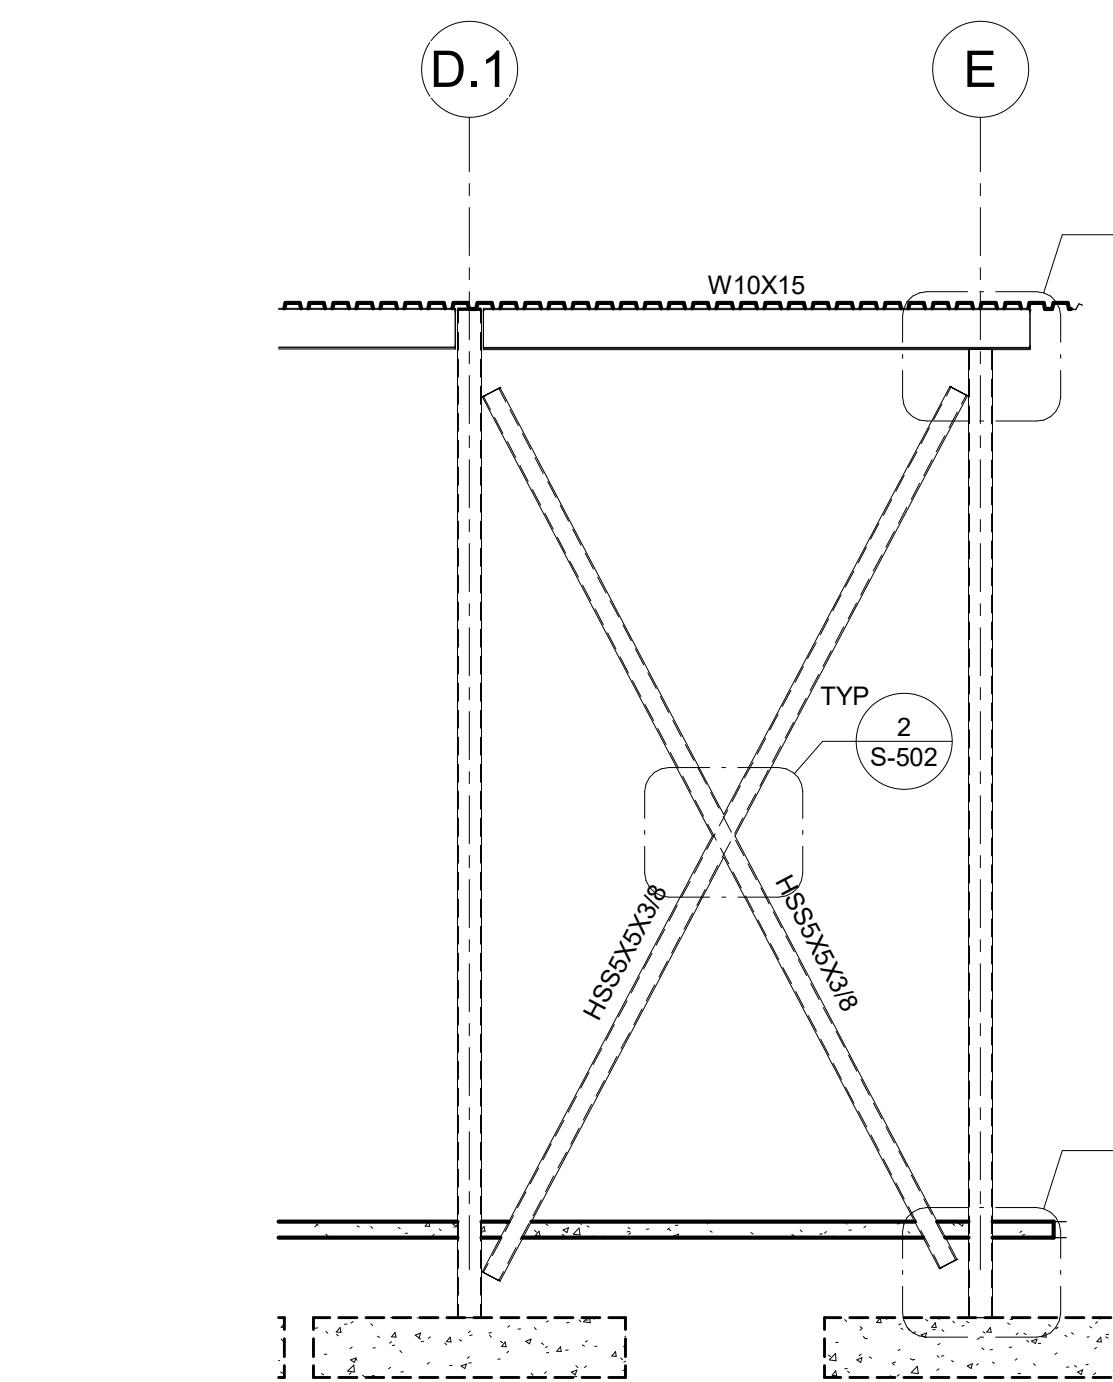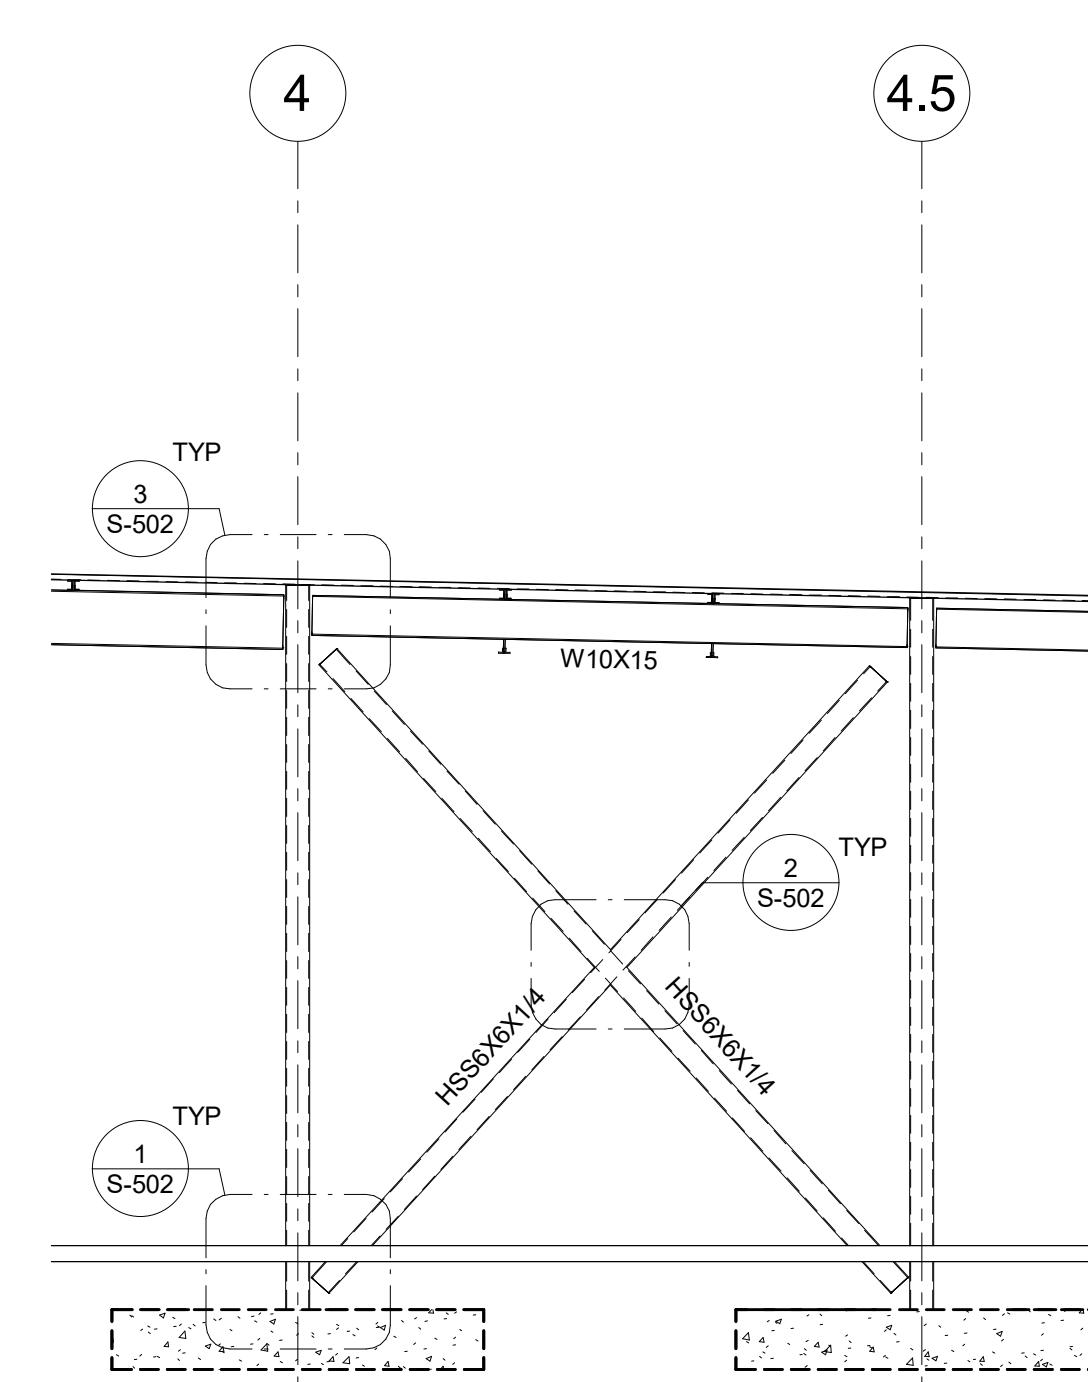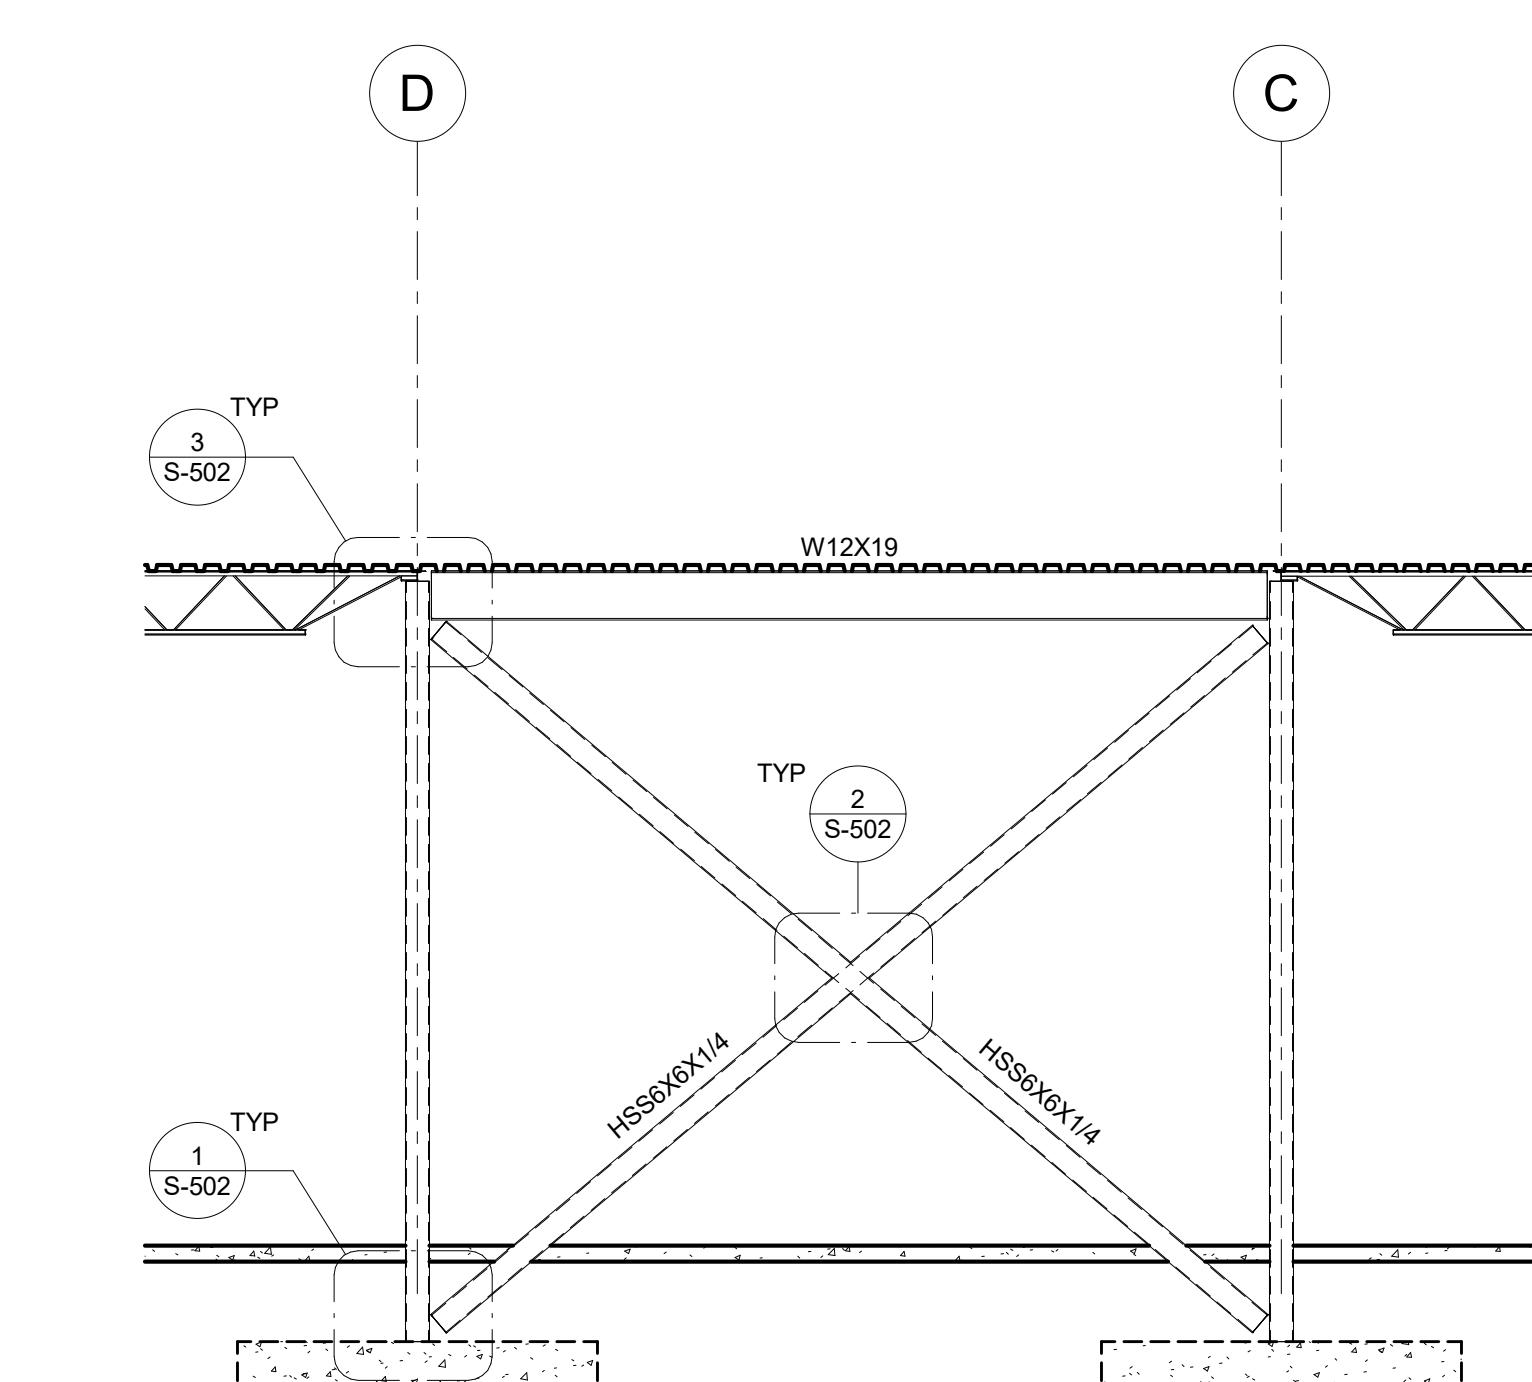P
N
M
L
K
J
H
G
F
E
D
C
B
A6 BRACED FRAME ALONG GRIDLINE 5
S-511 1/4" = 1'-0"4 BRACE FRAME ALONG GRIDLINE A
S-511 1/4" = 1'-0"2 BRACED FRAME ALONG GRIDLINE 1.4
S-511 1/4" = 1'-0"7 BRACED FRAME ALONG GRIDLINE D
S-511 1/4" = 1'-0"5 BRACED FRAME ALONG GRIDLINE 1
S-511 1/4" = 1'-0"3 BRACED FRAME ALONG GRIDLINE D
S-511 1/4" = 1'-0"1 BRACED FRAME ALONG GRIDLINE 3.5
S-511 1/4" = 1'-0"