GRADY SOUTH HOSPITAL


ESTIMATED EXTERIOR SKIN TAKEOFF PERCENTAGES FOR 200 BED TOWER

Horizontal Surfaces


	AREA	
Type A Extensive Green Roof	36,600	SF
Type B TPO Roof	212,100	SF
Type C CUP Roof	14,150	SF
Type D Entry Canopy	6,000	SF
Metal Panel Soffit	9,560	SF
Emergency Canopy Soffit	2,075	SF
TOTAL HORIZONTAL	**280,485**	**SF**

Vertical Surfaces


	AREA	
Type A Podium Public Facade	38,075	SF
Type B Podium Service Facade	27,810	SF
Type C Interstitial Mechanical	18,800	SF
Type D Patient Tower Facade	89,150	SF
Type E Penthouse Facade	10,240	SF
Type E CUP Facade	12,690	SF
Type F Public Parking Facade	38,555	SF
Type G Staff Parking Facade	52,610	SF
TOTAL VERTICAL	**287,930**	**SF**
TOTAL EXTERIOR	**568,415**	**SF**

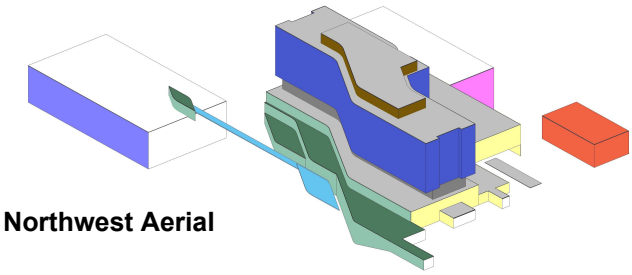


Northwest Aerial

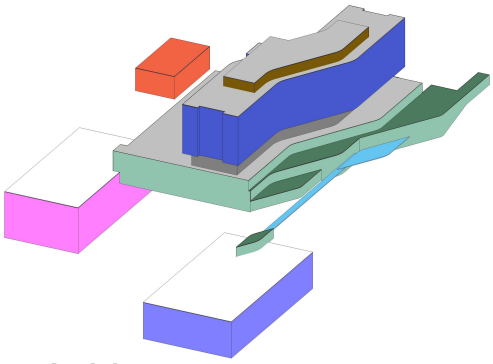

Northeast Aerial

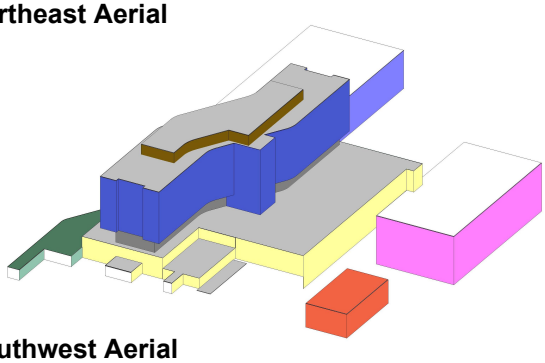

Southwest Aerial

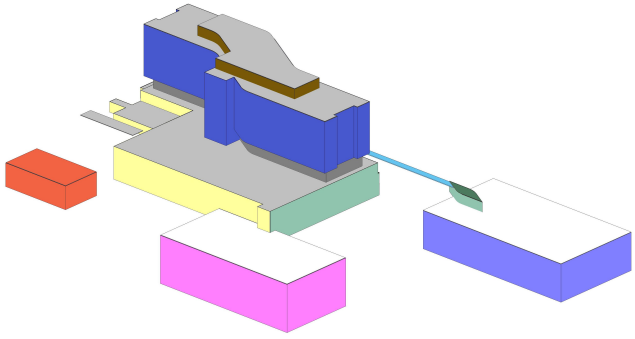

Southeast Aerial